

## 72 Fibre Stranded Loose Tube Cable with LSZH Sheath

Stranded cable comprising up to 72 optical fibres contained in jelly-filled loose tubes (up to 12 fibres per tube). The tubes and fillers are laid around a central strength member and contained within a dry, water blocked cable core, sheathed with a LSZH Jacket. Surface printing includes length marking at one metre intervals.

### Part Number

LMB6\*\*PA0††##

LKB6\*\*PA0¥¥##

### Applicable Specifications


AS/CA S008, AS 1049, AS/NZS 11801-1, AS/NZS IEC 60332.1, TIA-598-D, IEC 60793, IEC 60794, ITU-T Recommendations

### Applications

Low-Smoke Zero Halogen (LSZH) stranded loose tube cable is ideal for short-haul, long-haul and point-to-point drop cable applications where duct space is limited.

The LSZH sheath minimizes the flammability content of the cable making it suitable for use indoor in free draining duct and conduit, in protected (non-UV exposed) environments such as road/rail tunnels.

### Cable Components

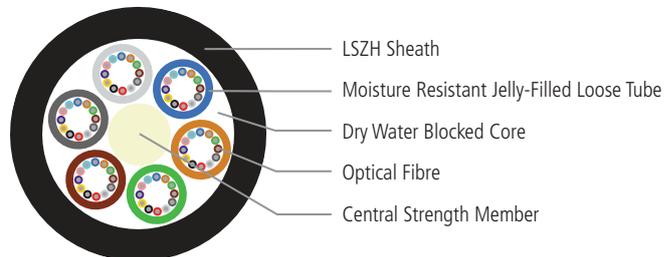

### Physical Characteristics

SPECIFICATION	UNIT	VALUE	
Nominal Tube Diameter	mm	2.0	
Nominal Cable Diameter	mm	8.8	
Nominal Weight	kg/km	80	
Temperature Range	°C	-40 to 70	
Max. Pulling Tension - Install	kN	2	
Min. Bending Radius - Under Load	mm	20 x OD	
Min. Bending Radius - No Load	mm	10 x OD	
Max. Crush Resistance	Short-term (10 min)	kN/100 mm	2
	Long-term (120 min)	kN/100 mm	2
Impact	kg.m	1	

\*\* Represents any fibre type, 1D = SM G.652.D "LWP", 1E = SM premium G.652.D "LWP", 1F = SM G.657.A1, 62 = 62.5 µm multimode "OM1", 53 = 50 µm multimode "OM3", 55 = 50 µm multimode "OM4". Contact AFL for other fibre types.

†† Represents any fibre-count up to 72 (LMB6 - 12F/Tube).

¥¥ Represents any fibre-count up to 36 (LKB6 - 6F/Tube).

## Represents LSZH sheath colour, BK = Black, BE = Blue, WE = White, YW = Yellow, other colours available upon request.

Refer to OSP Cable - Optical Characteristics for further information.