

DOSSERT[®] TYPE B7070 Series

**Coupler, Bolted, For Tubular Bus Conductor
Recommended for Voltages Up to 765 kV**


Bolted coupler is designed to be corona free for 765kV operation. Bolt heads are captive for one wrench installation. Contact surfaces are protected with oxide inhibitor.

Material

Aluminum Alloy

Hardware

Yellow anodized aluminum bolts, nuts, washers, and lockwashers.

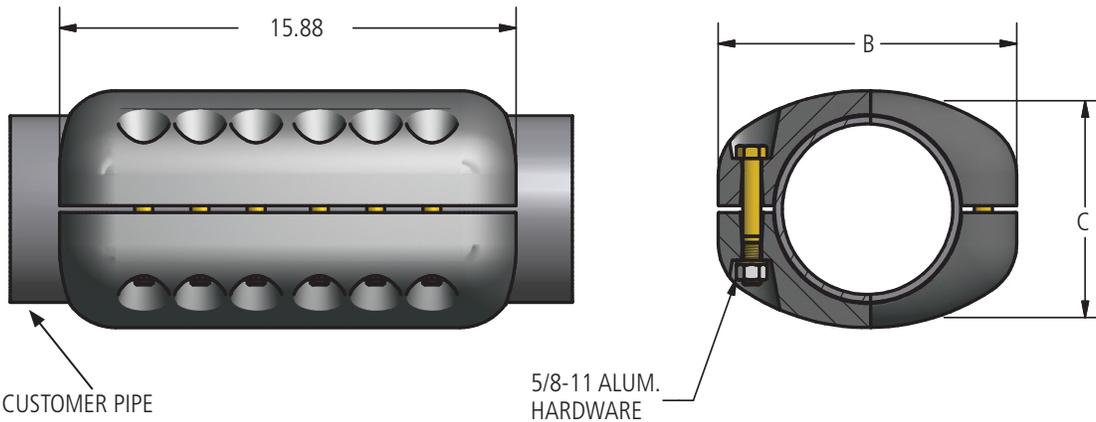

Ordering Information

CATALOG NUMBERS	CONDUCTOR SIZE TUBULAR BUS SPS & EHPS	DIMENSIONS IN INCHES		NOMINAL WEIGHT LBS
		B	C	
B7070-A	6	10.38	8.08	40.6
B7070-B	5	9.56	7.06	36.8

765 kV Couplers

DOSSERT®

TYPE WWC-AA, WWC-E-AA

Aluminum Welded Coupler Rated for 765 kV

Coupler is designed to make connections with high mechanical strength and high electrical conductivity.




Material

Aluminum tubing

Hardware

Aluminum cotter pin

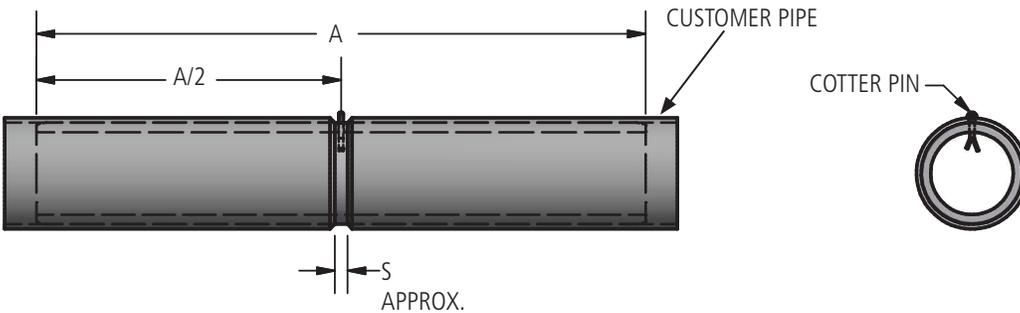

Ordering Information

CATALOG NUMBER		SPS / EPHS	DIMENSIONS (INCHES)	
SCHEDULE 40	SCHEDULE 80		A	S
WWC600-AA	WWC600E-AA	6	24	5/8