


Single Trunnion Cable Support



Double Trunnion Cable Support (closed)



Double Trunnion Cable Support (open)



Conversion Kit

Trunnion Assemblies— Single and Double Cables

AFL offers trunnions with various mounting capabilities: bolted, banded or standoff. Trunnions reduce installation costs by functioning as a pull-through during installation (maximum line angle for stringing is 15° total, 7.5° per side, number of structures not to exceed 30). No block or pulley is needed provided these conditions are met.

Features

- May be used as a pull-through by removing the bushing inserts
- Double cable supports option
- High-strength aluminum
- Smaller and more compact design
- Facilitates faster installation
- Color-coded range taking inserts for easy identification
- Versatile mounting styles to fit different structure types: bolted, banded or standoff
- Banding and pole hardware supplied by customer
- Lowers the total cost of installation
- Span Length: 600 ft.—NESC Heavy
1,200 ft.—NESC Light

Ordering Information—Single Cable Support

AFL NO.	CABLE O.D. RANGE		ESTIMATED WEIGHT		BUSHING COLOR CODE
	INCHES	MILLIMETERS	LBS	KG	
ATGN325/375	0.325" - 0.375"	8.26 - 9.53	2.06	.934	Green + White
ATGN376/419	0.376" - 0.419"	9.55 - 10.64	2.06	.934	Orange + White
ATGN420/474	0.420" - 0.474"	10.67 - 12.05	2.05	.930	Purple + White
ATGN475/525	0.475" - 0.525"	12.07 - 13.34	2.05	.930	Blue
ATGN526/575	0.526" - 0.575"	13.36 - 14.61	2.05	.930	Orange
ATGN576/625	0.576" - 0.625"	14.63 - 15.88	2.04	.925	Brown
ATGN626/675	0.626" - 0.675"	15.90 - 17.15	2.04	.925	Green
ATGN676/725	0.676" - 0.725"	17.17 - 18.42	2.03	.921	White
ATGN726/775	0.726" - 0.775"	18.44 - 19.69	2.03	.921	Red
ATGN776/825	0.776" - 0.825"	19.71 - 20.96	2.02	.916	Purple
ATGN826/875	0.826" - 0.875"	20.98 - 22.23	2.02	.916	Yellow
ATGN876/925	0.876" - 0.925"	22.25 - 23.50	2.02	.916	Pink
ATGN926/959	0.926" - 0.959"	23.52 - 24.36	2.02	.916	Blue + White
ATGN960/1045	0.960" - 1.045"	24.38 - 26.54	2.02	.916	Gray

Application Notes:

1. For use with ADSS cables with polyethylene jackets in low voltage environments only. Not for use in high voltage environments where tracking resistant cables are required.
2. As a stringing block:
Maximum line angle = 15° (7.5° per side)
Maximum number of structures = 30
3. For final installation:
Maximum line angle = 22° (11° per side)

continued
→


Trunnion Assemblies (cont.)

Ordering Information—Double Tangent Support

BUSHING NUMBER		CABLE O.D. RANGE		BUSHING COLOR CODE	MAXIMUM SPAN CAPABILITIES USING NESC LOADS IN FEET/METERS	ESTIMATED WEIGHT	
"A"	"B"	INCHES	MM			HEAVY	LBS
325	325	.325-.375	8.26-9.53	Green + White	600/182.9	4.00	1.814
376	376	.376-.419	9.55-10.64	Orange + White	600/182.9	4.00	1.814
420	420	.420-.474	10.67-12.04	Purple + White	600/182.9	3.99	1.810
475	475	.475-.525	12.07-13.34	Blue	600/182.9	3.99	1.810
526	526	.526-.575	13.36-14.61	Orange	600/182.9	3.99	1.810
576	576	.576-.625	14.63-15.88	Brown	600/182.9	3.98	1.805
626	626	.626-.675	15.90-17.15	Green	600/182.9	3.98	1.805
676	676	.676-.725	17.17-18.42	White	600/182.9	3.97	1.801
726	726	.726-.775	18.44-19.69	Red	600/182.9	3.97	1.801
776	776	.776-.825	19.71-20.96	Purple	600/182.9	3.96	1.796
826	826	.826-.875	20.98-22.23	Yellow	600/182.9	3.96	1.796
876	876	.876-.925	22.25-23.50	Pink	500/152.4	3.96	1.796
926	926	.926-.959	23.52-24.36	Blue + White	CONTACT AFL	3.96	1.796
960	960	.960-1.045	24.38-26.54	Gray	CONTACT AFL	3.96	1.796

How to Order

Order by assembling part number as shown:

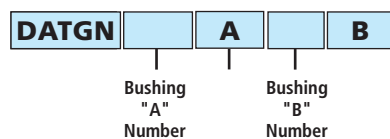

- Reference table above. See Note 1 below.
- Example:
 - First cable 0.500" OD → Bushing "A" number = 475
 - Second cable 0.750" OD → Bushing "B" number = 726
 - Order by part number: DATGN475A726B

Notes:

1. Bushing "A" and "B" may be the same or different.
2. Attachment hardware or stainless steel banding to be supplied by customer.
3. To order Conversion Kits, use part number DATGNDCBWH.

