


# Types NRLA-R3, NLRA-P3 Limiter Link

The limiter link has a dual function of serving as a connecting coupler as well as a fuse. The fusible section determines the time-current characteristics of each size. This is made to close tolerances to insure consistent conformity with the fusing time-current curves.

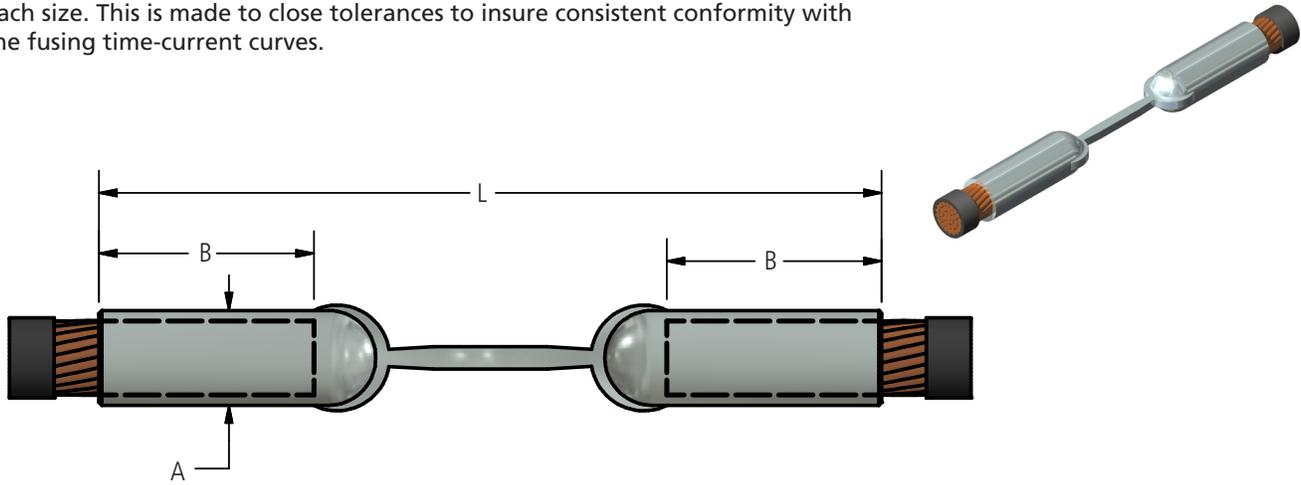

## Ordering Information

Catalog Number		Cable Size	Indents in Cable Socket	Dimensions in inches		
For Rubber Insulated Cable	For Paper* Insulated Cable			A**	B	L
NRLA21-R3	NRLA21-P3	4/0 STR	1	11/16	1 3/4	6 3/8
NRLA25-R3	NRLA25-P3	250 MCM	1	3/4	1 7/8	6 3/8
NRLA30-R3	NRLA30-P3	300 MCM	2	13/16	2	6 3/4
NRLA35-R3	NRLA35-P3	350 MCM	2	7/8	2	6 3/4
NRLA40-R3	NRLA40-P3	400 MCM	2	31/32	2 1/8	7
NRLA50-R3	NRLA50-P3	500 MCM	2	1 1/16	2 3/4	8 3/4
NRLA75-R3	NRLA75-P3	750 MCM	2	1 5/16	2 3/4	9

\* Closed end of sockets are sealed to make sockets oil tight.

\*\* Diameter.

AFL's Dossert® product line offers a wide range of substation accessories in low voltage up to 765 kV applications in bronze or aluminum materials.