


# Type RLM-E Renewable Limiter Link Assembly

An insulating renewable limiter link assembly which serves as both a fuse and coupler. The renewable link offers a quick and inexpensive means of re-energizing cleared circuits. The renewable link also provides the possibility of regulating the circuit protection to various levels of current by choice of link ampere capacity.

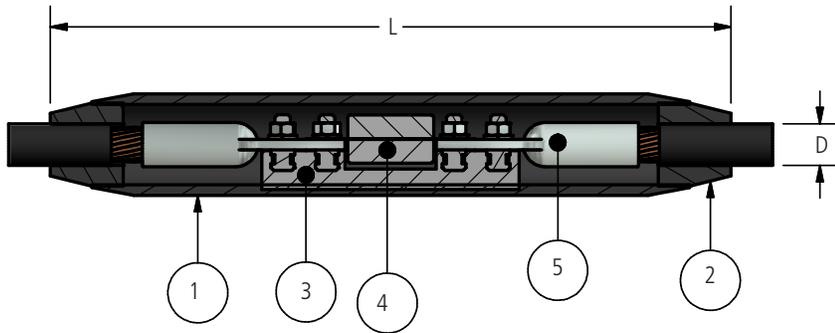

## Elements

Type No.	Name
RLM-1	1 Limiter Insulating Sleeve
RLM-2	2 Limiter Insulating Bushing
RLM-50B	3 Limiter Mounting Block
F	4 Limiter Renewable Link
RL-2	5 Compression Terminal

## Ordering Information

Catalog Number	Cable Size	No. of Indents	Dia. Over Cable Insulation D	L in inches	Renewable Limiter Link Furnished*	
					Catalog Number	Amp. Capacity
RLM2-E	6 STR	1	Diameter over cable insulation to be specified on order.	16 3/8	F50	50
RLM4-E	4 STR	1		16 3/8	F75	75
RLM6-E	2 STR	1		16 3/8	F100	100
RLM8-E	1 STR	1		16 3/8	F100	100
RLM10-E	1/0 STR	1		16 3/8	F150	150
RLM13-E	2/0 STR	1		16 3/8	F150	150
RLM17-E	3/0 STR	1		16 3/8	F200	200
RLM21-E	4/0 STR	1		16 3/8	F250	250
RLM25-E	250 MCM	1		16 3/8	F250	250
RLM30-E	300 MCM	2		16 3/8	F300	300
RLM35-E	350 MCM	2		16 3/8	F300	300
RLM40-E	400 MCM	2		16 3/8	F400	400
RLM50-E	500 MCM	2	16 3/8	F400	400	

\* Minimum clearing current of furnished limiter is approximately NEC rubber insulated cable rating X2.

AFL's Dossert® product line offers a wide range of substation accessories in low voltage up to 765 kV applications in bronze or aluminum materials.