

## 72 Fibre Stranded Loose Tube Cable

Stranded cable comprising up to 72 optical fibres contained in jelly-filled loose tubes (up to 12 fibres per tube). The tubes and fillers are laid around a central strength member and contained within a dry, water blocked cable core, sheathed with polyethylene (PE) and UV stable, termite resistant nylon jacket. Surface printing includes length marking at one metre intervals.

### Part Number

LMD6\*\*PA0††BE

LKD6\*\*PA0¥¥BE


### Applicable Specifications

AS/CA S008, AS 1049, AS/NZS 11801-1, TIA-598-D, IEC 60793, IEC 60794, ITU-T Recommendations

### Applications

Stranded loose tube cable is ideal for short and long-haul, point-to-point and point-to-multipoint backbone applications, and can be installed in-duct or direct-buried. UV stabilised outer jacket as per AS 1049.

### Cable Components

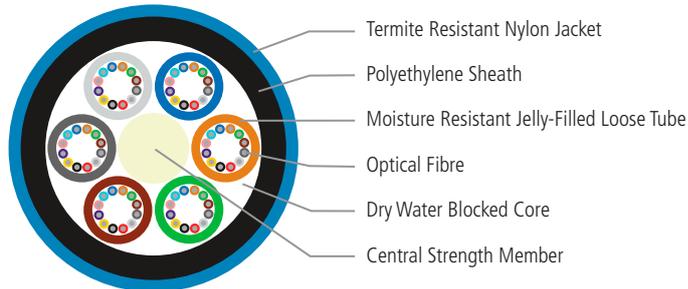

### Physical Characteristics

SPECIFICATION	UNIT	VALUE	
Nominal Tube Diameter	mm	2.0	
Nominal Cable Diameter	mm	9.6	
Nominal Weight	kg/km	75	
Temperature Range	°C	-40 to 70	
Max. Pulling Tension - Install	kN	2	
Min. Bending Radius - Under Load	mm	20 x OD	
Min. Bending Radius - No Load	mm	10 x OD	
Max. Crush Resistance	Short-term (10 min)	kN/100 mm	2
	Long-term (120 min)	kN/100 mm	2
Impact	kg.m	1	

\*\* Represents any fibre type, 1D = SM G.652.D "LWP", 1E = SM premium G.652.D "LWP", 1F = SM G.657.A1, 62 = 62.5 µm multimode "OM1", 53 = 50 µm multimode "OM3", 55 = 50 µm multimode "OM4". Contact AFL for other fibre types.

†† Represents any fibre-count up to 72 (LMD6 - 12F/Tube).

¥¥ Represents any fibre-count up to 36 (LKD6 - 6F/Tube).

Refer to OSP Cable - Optical Characteristics for further information.