

COASTAL FOLDING DOORS

Architectural Collection



KEY FEATURES

- 2- to 16-panel configurations available, opening from the left, right or center; maximum 8 panels in a single direction
- · Contemporary profile maximizes light and view
- PG upgrade option or Impact glass options with high performance impact-resistance glass or monolithic impact-resistance glass
- Hallmark certified rating for air, water and structural performance and NFRC performance rated
- Standard AAMA 2605 exterior finish
- · Corrosion-resistant, multi-point locking system secures the door firmly
- Optional retractable insect screen

SIZING


- Units built up to 10' tall with Hallmark and Florida building code approvals*
- Rough openings as wide as 24', panels up to 28.75 sq ft
- Panels up to a maximum 48" wide to 7' 6 5%" tall, 45 ¼" wide to 8' tall, 40" wide to 9' tall and 36" wide to 10' tall
- Minimum unit height: door units without exterior access hardware: 41 %"; door units with exterior access hardware: 79 ¼"

PANEL FEATURES

- 3 11/16" panel profile on all sides with a 2 1/4" panel thickness
- Optional bottom rail heights of 4 11/16", 8" or 12" available
- Maximum weight per panel is 250 lbs
- 2/3 and 3/4 light intermediate rail with panel option
- Standard concealed shoot bolt hardware available in brushed stainless steel or bronze stainless steel

HIGH PERFORMANCE SILL

 Standard high performance on-floor drainage sill is thermally broken for improved thermal performance and features a 2 %" high sill stop





Available in gray and bronze.

PERFORMANCE COMPARISON CHART

CONFIGURATION	4R	3L3R	4L2R
AAMA/WDMA/CSA 101/IS2/A440-08 AND -11	Class LC-PG50 Size Tested: 146.6" x 119.5" ^{**†}	Class LC-PG50 Size Tested 220.1" x 119.5" ¹¹	Class LC-PG50 Size Tested 220.1" x 119.5" ^{**†}
DESIGN PRESSURE (DP)	+50/-50	+50/-50	+50/-50
AIR INFILTRATION (CFM/FT²)	0.04	0.09	0.07
WATER TEST PRESSURE (PSF)	7.52	7.52	7.52
FLORIDA APPROVAL FL#14326	HVHZ Impact & Non-Impact	HVHZ Impact & Non-Impact	HVHZ Impact & Non-Impact


- *Visit andersenwindows.com for performance information.
- **Hallmark rated max panel size: 28.75 sq. ft. †Actual door size tested; certification maximum door size 288" x 119.5".
- Performance Grade (PG) ratings may vary from tested performance rating for larger or smaller units of a particular type.
- This data is accurate as of October 2020. Due to ongoing product changes, updated test results or new industry standards, this data may change over time.
- Where designated, Andersen® products are certified and labeled to the requirements of the Hallmark Certification Program. Actual performance may vary based on variations in manufacturing, shipping, installation, environmental conditions and conditions of use.
- Contact your Andersen supplier for more information.
- DP varies, see Florida Approval FL# 14326 for details.

COASTAL FOLDING DOORS

FINISH OPTIONS

EXTERIOR OPTIONS FOR ALUMINUM-CLAD WOOD DOORS

Painted Finishes

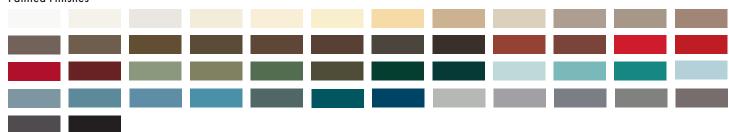

INTERIOR OPTIONS

Wood Species All wood interiors are unfinished unless an interior finish is specified.



Naturally occurring variations in grain, color and texture of wood make each window one of a kind.

Painted Options Available on pine.



HARDWARE[†]




Bold name denotes finish shown.

FSB^o


Aluminum

Durable FSB hardware features clean lines and a sleek finish for a thoroughly modern look.



Yale® Assure Lock®

The Yale Assure Lock allows you to monitor, lock and unlock your door from anywhere.



Distressed bronze and oil rubbed bronze are "living" finishes that will change with time and use. Bright brass and satin nickel finishes feature a 10-year limited warranty.



^{*}Actual wood species is either Sapele or Sipo, both non-endangered species grown in Africa, with color and characteristics similar to Central American mahoganies. **Anodized silver, black and dark bronze are also available on maple. †Hardware sold separately. ††FSB style 1102 is not available in black anodized aluminum.

[&]quot;FSB" is a registered trademark of Franz Schneider Brakel GmbH & Co.

[&]quot;Andersen" and all other marks where denoted are trademarks of Andersen Corporation. ©2020 Andersen Corporation. All rights reserved. 10/20