

Commercial Outswing Entry Door Details


Scale $1^{1}/2$ " (38) = 1'-0" (305) -1:8


4 9/16" (116) 15/16" (33)Jamb Depth (33) 9 3/16" Minimum Rough Opening Height Unit Dimension Height $11^{1/2}$ " (292)

Vertical Section

Sash-Set Commercial Outswing Entry Door Sidelight Detail

Scale $1^{1}/2$ " (38) = 1'-0" (305) -1:8

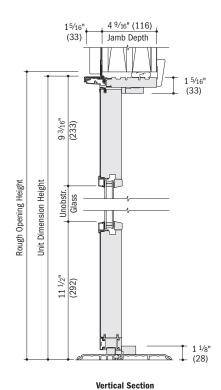



Horizontal Section 4 9/16" (116) Jamb Depth 1⁵/₁₆" (33) 6 7/16" 12 1/4" (311) 6 7/16" (164) Glass Glass (164) Unit Dimension Width 3/8" (10)(10)Minimum Rough Opening Width

Horizontal Section Two-Panel

- 4 9/s" (116) jamb depth measurements are from back side of installation flange.
 Light-colored areas are parts included with door. Dark-colored areas are additional Andersen* parts required to complete door assembly as shown.
- Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Details are for illustration only and are not intended to represent product installation methods or materials. Refer to unit installation guides at andersenwindows.com.
 Dimensions in parentheses are in millimeters.
- · Clad details shown, wood also available.

2019 A-Series Product Guide