

HP40/50-5-1PHMB

Heat Pump air/water 'inverter'

Dimensions

Height	700 mm
Depth	400 mm
Width	1309 mm
Weight Net	86 kg
Weight with Packaging	107 kg

Performance

Min/Max Operating Range (°C)	-25/+35
SCOP 35°C	4.77
SCOP 45°C	4.06
SCOP 55°C	3.39

35°C Flow

Maximum Output ⁽¹⁾

A-5°C W+35°C	6.14 kW
A0°C W+35°C	6.35 kW
A+7°C W+35°C	7.41 kW

Nominal Output ⁽²⁾

A-5°C W+35°C	5.26 kW
A0°C W+35°C	5.74 kW
A+7°C W+35°C	6.35 kW

45°C Flow

Maximum Output ⁽¹⁾

A-5°C W+45°C	5.84 kW
A0°C W+45°C	6.85 kW
A+7°C W+45°C	7.13 kW

Nominal Output ⁽²⁾

A-5°C W+45°C	5.10 kW
A0°C W+45°C	6.06 kW
A+7°C W+45°C	6.30 kW

55°C Flow

Maximum Output ⁽¹⁾

A-5°C W+55°C	5.31 kW
A0°C W+55°C	5.42 kW
A+7°C W+55°C	6.90 kW


Nominal Output ⁽²⁾

A-5°C W+55°C	4.28 kW
A0°C W+55°C	4.75 kW
A+7°C W+55°C	6.00 kW

Sound Pressure Level @1m	47.5 dB(A)
Sound Power Level (EN12102-1)	58.0 dB(A)



Clearances

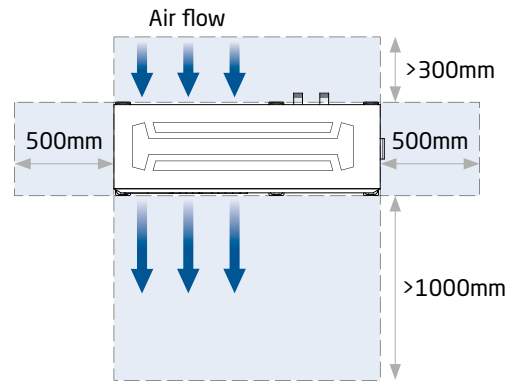

Electrical Details

Power Supply	220V-240V/1Ph/50Hz
MCA	14 A
TOCA	18 A
MFA	25 A

Hydronic Details

Flow/Return Connections	G 1"
Internal Expansion Vessel	8 L
Pre-Pressure	1.5 Bar
Maximum Water Pressure	3 Bar
Minimum System Volume	25 L

Refrigerant Circuit Details

Refrigerant	R32
Volume	1.4 kg
Compressor Type	Twin Rotary

For more information on Baxi ASHPs visit baxi.co.uk

Baxi may introduce modifications to their products from time to time. Consequently the details given in this data sheet are subject to alteration without notice.

(1) Output values tested at maximum compressor frequency

(2) Nominal output values under test conditions EN14825:2013

Selections and sizing offered by Baxi utilise nominal values unless otherwise stated.