
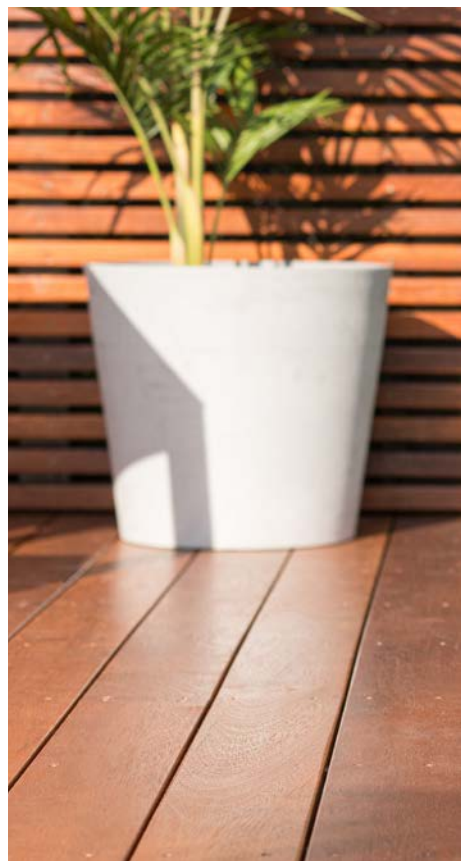
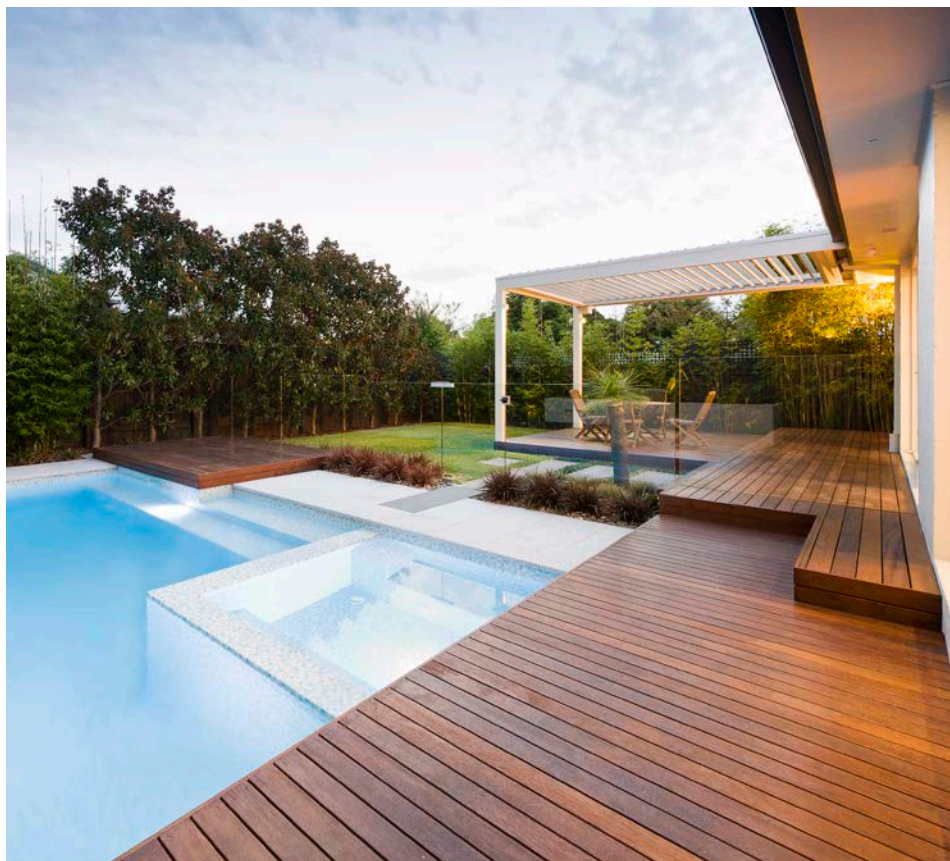


SpecRite Merbau
Product Range

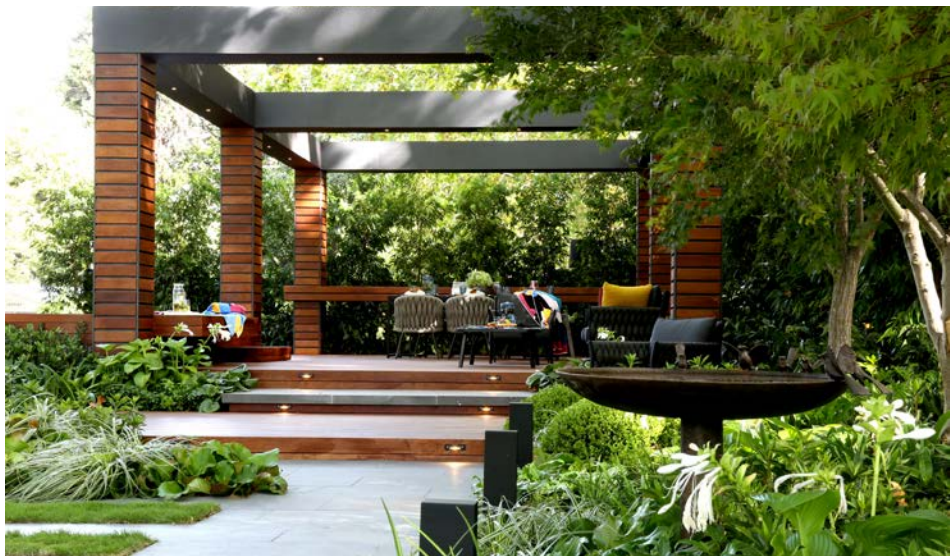


Why Choose SpecRite Merbau?

Stable

Timber naturally expands and contracts with changes to the environment, such as heat and moisture. Unstable timbers are likely to split or warp. Choosing the right timber for the job is critical for avoiding these issues.

Compared to other popular decking timbers available in Australia, Merbau provides high stability with very low dimensional movement, offering a long lasting, premium look, and a lower risk when it comes to splitting, cupping and twisting.

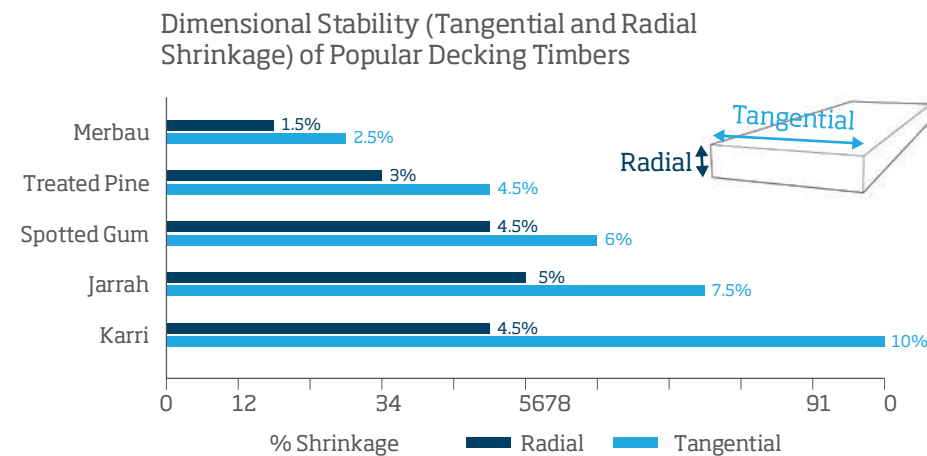

Durable

When you invest in a decking project you want your investment to pay off in terms of both appearance and longevity.

Merbau is rated class 1 for durability as an above ground timber, meaning it has a life expectancy of more than 40 years¹ when installed and maintained correctly. It is naturally less susceptible to rot and decay compared with many other decking timbers.

Pre-Oiled

SpecRite Merbau comes pre-oiled with Feast Watson® Industrial Timber Oil, providing a base level of protection to the underside of your deck, and helping seal and protect your timber from moisture and UV exposure prior to final topcoating.

Sustainable

SpecRite offers FSC®-certified merbau options*.

The Forest Stewardship Council® (FSC) is dedicated to promoting responsible management of the world's forests. FSC is a positive force for change that supports biodiversity, climate resilience, workers' and Indigenous Peoples' rights, and community livelihoods.

*Look for our FSC-certified products in store.

When you choose FSC-certified products, you're helping to take care of forests for future generations.



FSC certification requires periodic review and you can check the FSC status of our SpecRite Merbau supplier at any time:

info.fsc.org
Certification No:
SCS-COC-005449

Bushfire Resistant

Merbau is rated BAL 29 for bushfire resistance, meaning it can be used in areas susceptible to bushfires.

Follow guidance from your relevant building authority to ensure full compliance.


Resistant to Termites and Fungi

Merbau is naturally resistant to termites, dry wood borers and fungi, giving you added reassurance that your investment will last.

¹ Source: Australian Standard 5604-2005 Timber - Natural Durability Ratings

A great finish starts with **SpecRite Pre-Oiled Merbau**

The **pre-oiled** difference

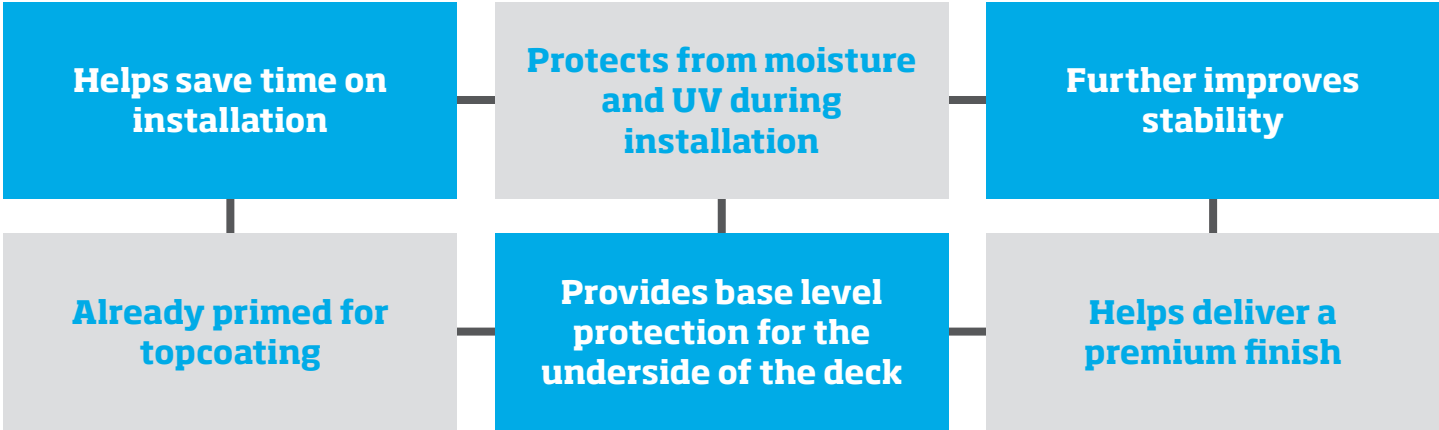

When laying a deck, it's common to lay the raw timber, allow it to weather and then apply decking oil. This tried and tested method works well in protecting the deck from UV after installation, but the process can result in dark, unsightly blotches where tannins in the timber have reacted to trace metals, for example, from muddy work boots during the build, or from the water supply when hosing down the timber to flush away excess tannins before the deck has been sealed.

The underside of the deck is rarely exposed to UV, but it is exposed to moisture, particularly if the deck is exposed to the elements. Excess moisture build-up from inadequate ventilation or drainage underneath the deck can affect the stability of the timber and cause unsightly cupping and twisting, and can even impact the structural integrity of the subframe.

SpecRite's Pre-Oiled Merbau Decking has been primed with Feast Watson® Industrial Timber Oil, which can be topcoated with most water-based and oil-based finishes. A single coat has been applied to all four sides and is designed to help seal and protect your timber from moisture, dirt and UV exposure prior to final topcoating.

“Our pre-oiled decking can be topcoated with most water-based and oil-based finishes.”



PRE-OILED WITH

FEAST WATSON®

ESTD 1922

PROFESSIONAL TIMBER FINISHES

READY FOR FINISHING ONSITE

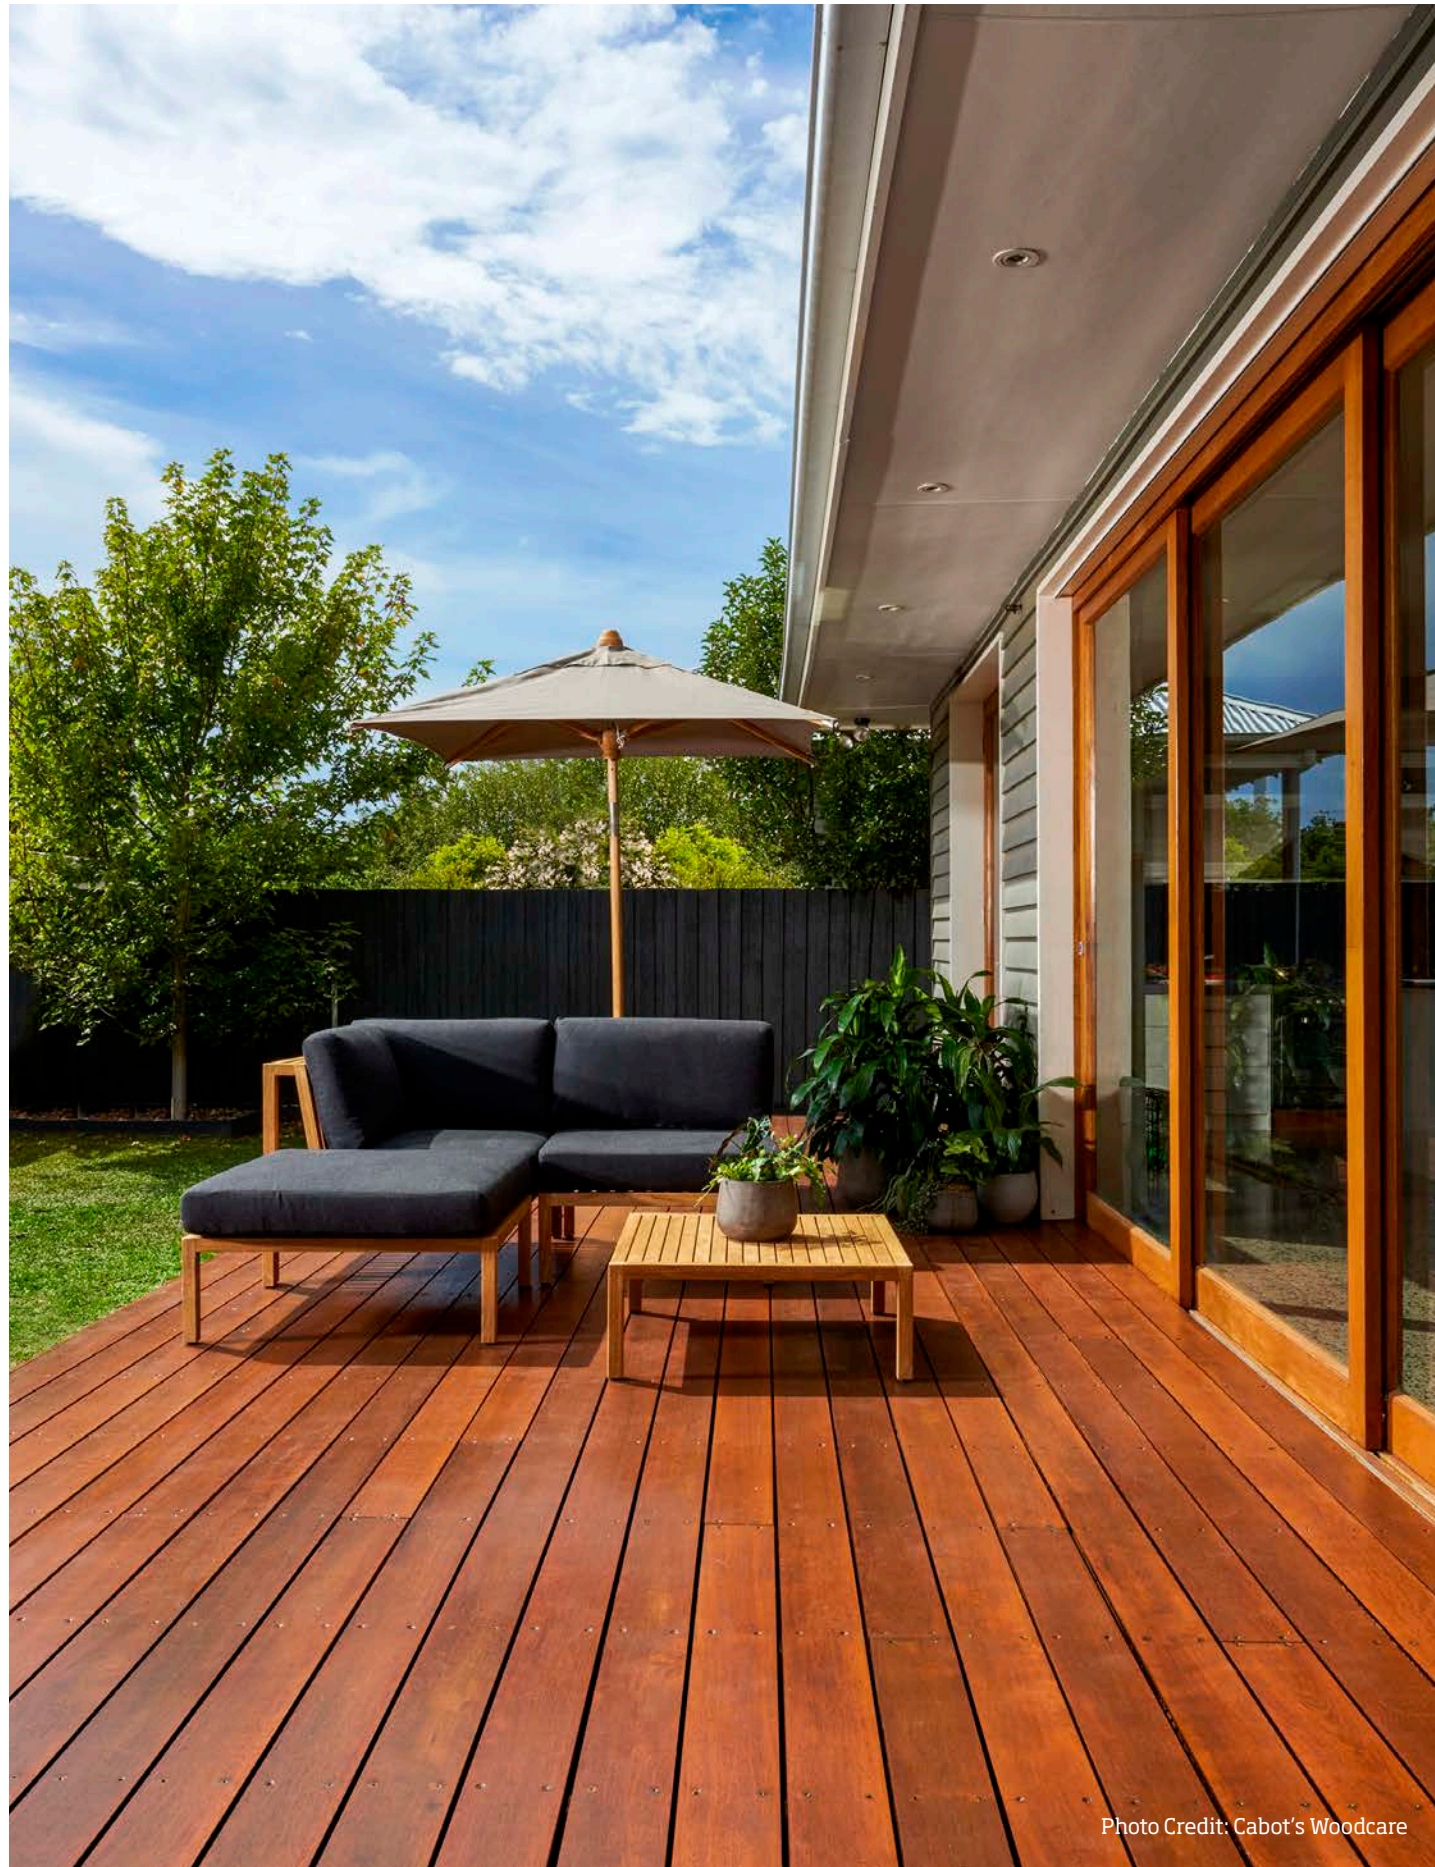


Photo Credit: Cabot's Woodcare

How to **topcoat** your pre-oiled deck

Step 1

To prepare timber for topcoating, ensure the surface is clean. If required, thoroughly scrub with Feast Watson® Woodclean. A high strength timber cleaner removes dirt, grease, tannin stains and other contaminants to optimise topcoat performance.

Step 2

Allow the timber to dry and apply two coats of your chosen finish following label instructions.

Coating can be walked on after 48 hours. Make sure your deck has dried fully before replacing furniture.

Step 3

SIT BACK & RELAX

Which oil should I use to topcoat my deck?

When choosing a topcoat, the most suitable product is best determined by your preferred look and feel.

To maintain or highlight the natural appearance of your merbau timber, a transparent, lightly pigmented oil is recommended such as Feast Watson® Traditional Timber Oil. For longer lasting protection, Intergrain® UltraDeck Timber Oil is recommended. To transform the colour of the timber, a semi-transparent stain such as Intergrain® UltraDeck Timber Stain will impart a deeper colour while allowing the timber grain to show through.

To ensure you are completely satisfied with your chosen coating and colour, we recommend you first test the coating on a small inconspicuous area.

Timber will naturally go grey if left unfinished.





Maintenance

Refer to your chosen topcoat label for product specific maintenance information. We recommend regularly monitoring the coated timber for signs of colour loss, dryness and weathering. Recoat the timber when it begins to show signs of dryness to help maintain its natural beauty and protection.



When required, clean the surface using a timber cleaner, allow the surface to dry and recoat with one coat of the original coating, following label instructions. For a longer lasting finish, apply a second coat.

The SpecRite Merbau Product Range





Pre-Oiled Decking
Random Lengths
90 x 19mm L/M

I/N: 0200172





Pre-Oiled Decking
Random Lengths
140 x 19mm L/M

I/N: 0200173





Pre-Oiled Decking
Joined Set Lengths
90 x 19mm 5.7m

I/N: 0177416





Pre-Oiled Decking
Joined Set Lengths
140 x 19mm 5.7m

I/N: 0177414



Pre-Oiled Garden
Fence Panel
1800 x 600 x 33mm



I/N: 8500298



Pre-Oiled Alternated Slat
Fence Panel
1800 x 902 x 30mm



I/N: 8500281







Pre-Oiled Gate
Vertical Slats
1800 x 900 x 30mm

I/N: 8500233





Pre-Oiled Gate
Horizontal Slats
1833 x 900 x 30mm

I/N: 8500232





Pre-Oiled Sorrento
Fence Panel
1800 x 658 x 60mm

I/N: 0569281 (*PROMO LINE)



600mm Multi-Purpose
Round Laminated Panel
600 x 600 x 18mm

I/N: 0421657





Pre-Oiled Decking
Finger Joined - 5 Pack
90 x 19mm 2.25m (x5)

I/N: 0064530



Pre-Oiled Decking
Finger Joined - 3 Pack
140 x 19mm 2.25m (x3)

I/N: 0064532



Finger Joined
Garden Edging
69 x 7mm 5.7m

I/N: 0064274 (VIC only)



Garden Border Roll
(Tapered)
200 x 18mm 2.01m

I/N: 3321641



1200mm Multi-Purpose
FJ Laminated Panel
405 / 600 x 18mm

I/N: 8330195 / 8330196



1800mm Multi-Purpose
FJ Laminated Panel
405 / 600 x 18mm

I/N: 8330197 / 0421658





2200mm Multi-Purpose
FJ Laminated Panel
600 x 26mm

I/N: 8330163





2400mm Multi-Purpose
Laminated Panel
900 x 33mm

I/N: 0421659





Pre-Oiled Fence Picket
Blank - Various Lengths
70 x 19mm 0.9/1.2/1.5/1.8m

I/N: 0019 534/535/536/537





Pre-Oiled Solid Screening
42 x 42mm 2.7m

I/N: 0517074





Pre-Oiled Solid Screening
70 x 19mm 2.7m

I/N: 0517075





Pre-Oiled Solid Screening
42 x 19mm 2.7m

I/N: 0517078





F27 Pre-Oiled KD DAR
200 x 50mm 2.4m

I/N: 0575945



GL17 Pre-Oiled Posts
Various Sizes

See overleaf for options



GL17 Pre-Oiled Beams
Various Sizes

See overleaf for options

View the full
SpecRite product
range online:



*Promo lines are available in selected stores until sold out
Visit [bunnings.com.au](https://www.bunnings.com.au) or call your local store to check stock availability

SpecRite Merbau GL17

Structural Posts and Beams



Our GL17 range is available in a variety of profiles and length options. See the table below to find out which products are available in your state.

Our new SpecRite GL17 merbau posts come with all the features and benefits of merbau, with the added benefit of solid pieces of no-join merbau on two sides, creating an attractive, robust and straight product that can be used in structural and aesthetic applications specified to GL17 or lower.

Applications

Our GL17 merbau posts and beams can be used in both indoor and outdoor applications including pergola posts and beams, roof beams, garage openings and handrails.

Structural Integrity

SpecRite GL17 merbau posts and beams have been certified to AS1328 and are backed by GLTAA (Glue Laminated Timber Association of Australia) approval.



Scan the QR code for more information including installation guidelines and span tables.

GL17 Availability by State:

• Available* • Not Available

PROFILE	LENGTH	ITEM NO.	ACT	NSW	NT	QLD	SA	TAS	VIC	WA
90 x 90mm	2.4m	0549667	•	•	•	•	•	•	•	•
	2.7m	0549671	•	•	•	•	•	•	•	•
	3.0m	0549662	•	•	•	•	•	•	•	•
	3.6m	0549668	•	•	•	•	•	•	•	•
	4.8m	0549677	•	•	•	•	•	•	•	•
	5.4m	0549659	•	•	•	•	•	•	•	•
100 x 100mm	3.6m	0746021	•	•	•	•	•	•	•	•
115 x 115mm	2.4m	0549656	•	•	•	•	•	•	•	•
	2.7m	0549674	•	•	•	•	•	•	•	•
	3.0m	0549660	•	•	•	•	•	•	•	•
	3.6m	0549664	•	•	•	•	•	•	•	•
	5.4m	0746019	•	•	•	•	•	•	•	•
120 x 120mm	2.4m	0549675	•	•	•	•	•	•	•	•
	2.7m	0549663	•	•	•	•	•	•	•	•
	3.0m	0549680	•	•	•	•	•	•	•	•
	3.6m	0549655	•	•	•	•	•	•	•	•
140 x 140mm	2.4m	0549673	•	•	•	•	•	•	•	•
	2.7m	0549665	•	•	•	•	•	•	•	•
	3.0m	0549669	•	•	•	•	•	•	•	•
	3.6m	0549679	•	•	•	•	•	•	•	•
	5.4m	0746020	•	•	•	•	•	•	•	•
90 x 42mm	5.4m	0549670	•	•	•	•	•	•	•	•
140 x 42mm	5.4m	0549658	•	•	•	•	•	•	•	•

*Visit [bunnings.com.au](https://www.bunnings.com.au) or call your local store to check stock availability





The mark of
responsible forestry

FSC certification requires periodic review and you can check the FSC status of our SpecRite Merbau supplier at any time:

info.fsc.org

Certification No: SCS-COC-005449

SpecRite™ 
Manufactured For Results.