


The same all stainless steel construction, and Fab-Tech's proprietary fluoropolymer coating, but at a **lower cost!** 

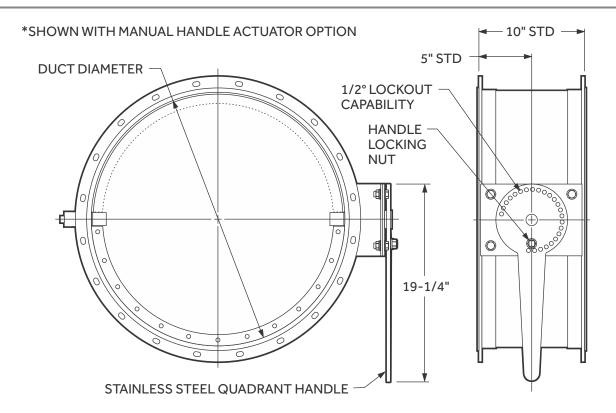

## **SPECIFICATIONS**

Body: Stainless steel body, rolled 12 GA fully fusion welded

Coating: Components in contact with airstream coated with proprietary fluoropolymer barrier coating

**Angle Rings:** Fully welded stainless steel Van Stone rings - mounting holes straddle vertical centerline

Blade: Stainless steel .250", opens CCW, Open/Close torque: 1000 in-lb recommended minimum

Axles: Stainless steel 1.38" diameter

Quadrant: Manual locking handle, all stainless steel construction with lockout capability in 1/2° intervals

Blade Stops: Keyed fully welded blade stops

Bearings: Nylon

**Shaft Seals:** Thermoplastic liquid tight seals

Blade Seal: Viton

## **OPTIONS**

**Actuators:** Manual gear drive / electric / pneumatic actuators

Mounting: Blank mounting kit (plate & shaft adapter) for customer supplied actuator

**Rings:** Stitch welded stainless steel Van Stone rings available, custom hole pattern available

Contact us today for more information:

Call: **802-655-8800** Fax: **802-655-8804** 

Website: www.fabtechinc.com
Email: sales@fabtechinc.com



An Exyte Group Company

Fab-Tech, Inc. 480 Hercules Drive Colchester, VT 05446-6800 USA

PSP® is a registered trademark of Fab-Tech, Inc.

Technical information contained in this document is subject to change without notice.

© FAB-TECH INC. 2016 REV: 1/5/16 HVHDDamper