

Owner: H+H Deutschland GmbH  
No.: MD-23056-EN  
Issued: 28-04-2023  
Valid to: 28-04-2028

3<sup>rd</sup> PARTY VERIFIED

EPD

VERIFIED ENVIRONMENTAL PRODUCT DECLARATION | ISO 14025 & EN 15804



**Owner of declaration**  
H+H Deutschland GmbH  
Industriestrasse 3  
DE-23829 Wittenborn  
VAT: 13427089



**Issued:**  
28-04-2023

**Valid to:**  
28-04-2028

**Programme**  
EPD Danmark  
[www.epddanmark.dk](http://www.epddanmark.dk)



- ☐ Industry EPD  
☒ Product EPD

#### Declared product(s)

The EPD covers all products listed below.

- Autoclaved aerated concrete blocks with a dry density of 375 kg/m<sup>3</sup>, also called Planstein PP 2/040
- Autoclaved aerated concrete blocks with a dry density of 535 kg/m<sup>3</sup>, also called Planstein PP 4/055

Number of declared datasets/product variations: 2

#### Production site

H+H production site in Germany  
Address: Industriestrasse 3, DE-23829 Wittenborn, Germany

#### Product(s) use

H+H produces autoclaved aerated concrete (AAC) and sand-lime products and solutions primarily for walls in residential, industrial, and commercial construction. The main purpose of the autoclaved aerated concrete blocks is as building material for making walls.

#### Declared/ functional unit

1 m<sup>3</sup> of installed autoclaved aerated concrete block

#### Year of production site data (A3)

2021, first version

#### Basis of calculation

This EPD is developed in accordance with the European standard EN 15804+A2.

#### Comparability

EPDs of construction products may not be comparable if they do not comply with the requirements in EN 15804. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database.

#### Validity

This EPD has been verified in accordance with ISO 14025 and is valid for 5 years from the date of issue.

#### Use

The intended use of an EPD is to communicate scientifically based environmental information for construction products, for the purpose of assessing the environmental performance of buildings.

#### EPD type

- ☐ Cradle-to-gate with modules C1-C4 and D  
☐ Cradle-to-gate with options, modules C1-C4 and D  
☒ Cradle-to-grave and module D  
☐ Cradle-to-gate  
☐ Cradle-to-gate with options

CEN standard EN 15804 serves as the core PCR

Independent verification of the declaration and data, according to EN ISO 14025

☐ internal ☒ external

Third party verifier:

Ninkie Bendtsen

Martha Katrine Sørensen  
EPD Danmark

#### Life cycle stages and modules (MND = module not declared)

Product			Construction process		Use							End of life				Beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport	Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Re-use, recovery and recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

# Product information

## Product description

The main product components are shown in the table below.

Material	Weight-% of declared product	
	AAC 375	AAC 535
Anhydrite	0%	1%
Aluminium paste	0,1%	0,06%
Cement	19%	16%
Gypsum	9%	1%
Lime	5%	9%
Mould oil	0,1%	0,05%
Plasticizer	0,02%	0%
Recycled AAC	0%	1%
Sand	35%	40%
Water	32%	31%
Sum	100%	100%

## Product packaging:

The composition of the sales- and transport packaging of the product is shown in the table below.

Material	Weight-% of packaging	
	AAC 375	AAC 535
Foil, Shrink hood	0%	3.2%
Foil, Stretch hood	5.4%	2.4%
Wooden pallet	94.6%	94.4%

## Representativity

This declaration, including data collection and the modelled foreground system including results, represents the production of the autoclaved aerated concrete products on the production site located in Germany. Product specific data are based on average values collected in the year 2021. Background data are based on the GaBi LCA software and are less than 10 years old. Generally, the used background datasets are of high quality, and the majority of the datasets are only a couple of years old.



Configuration with profiled surface

## Hazardous substances

The autoclaved aerated concrete products from H+H does not contain substances listed on the "Candidate List of Substances of Very High Concern for authorisation".

(<http://echa.europa.eu/candidate-list-table>)

## Essential characteristics

The autoclaved aerated concrete blocks are covered by harmonised technical specification in EN 771-4 and for the EPD it follows EN 15804. Declaration of performance according to EU regulation 305/2011 is available for all declared product variations.

Further technical information can be obtained by contacting the manufacturer or on the manufacturer's website:

<https://www.hplush.dk>


<https://www.hplush.de>

## Reference Service Life (RSL)

The reference service life (RSL) of the product is set to 80 years.

## Picture of product(s)

Below is shown photos of autoclaved aerated concrete block.

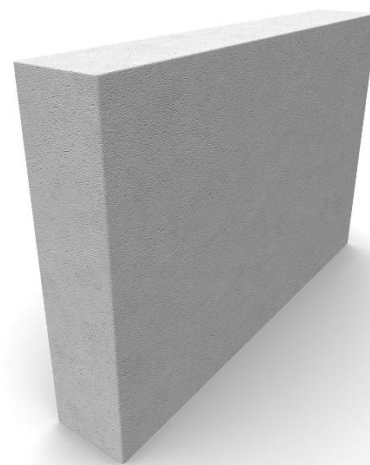

Configuration with plain surface

## LCA background

### Declared unit

The LCI and LCIA results in this EPD relates to 1 m<sup>3</sup> of installed autoclaved aerated concrete product with a construction waste percentage of 2%.


Name	AAC 375 Planstein PP 2/040	AAC 535 Planstein PP 4/055
Declared unit, m <sup>3</sup>	1	1
Total density per product at the factory gate, kg/m <sup>3</sup>	529	754
Conversion factor to 1 kg	0.0019	0.0013

Dry density per product, kg/m <sup>3</sup>	375	535
Total density per product for demolition, kg/m <sup>3</sup>	388	554

\*As the water content of the aerated concrete blocks change during their respective lifetime, the density of the dry product and of the demolished product is also provided below.

### Flow diagram

The process diagram below represents the life cycle of an autoclaved aerated concrete product from H+H.

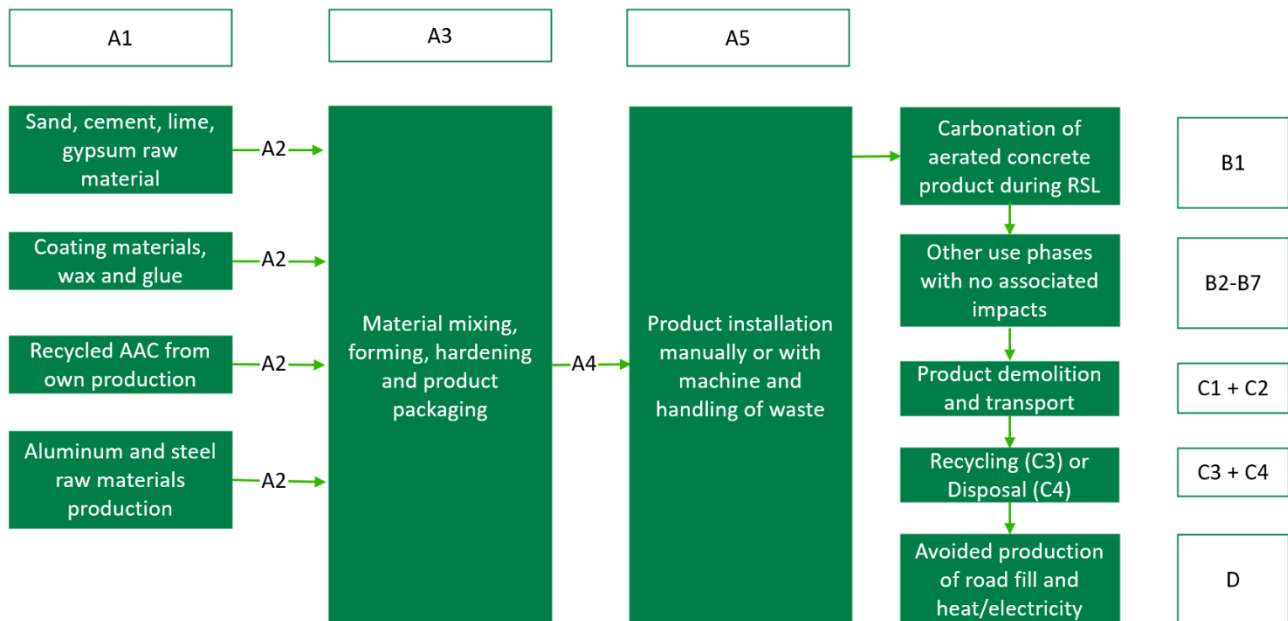

### Functional unit

Not defined.

### PCR

This EPD is developed according to the core rules for the product category of construction products in EN 15804 version A2:2019 and cPCR EN 16757:2022 Product Category Rules for concrete and concrete elements.

### Guarantee of Origin – certificates

No guarantees of origin or certificated are used for green electricity or energy production.

For modelling energy production, the country specific residual mix is used, in accordance with the recommendations from EPD Denmark



## System boundary

This EPD is based on a cradle-to-gate LCA, in which 100 weight-% has been accounted for.

The general rules for the exclusion of inputs and outputs follows the requirements in EN 15804, 6.3.5, where the total of neglected input flows per module shall be a maximum of 5 % of energy usage and mass and 1 % of energy usage and mass for unit processes.

### Product stage (A1-A3) includes:

A1 – Extraction and processing of raw materials  
A2 – Transport to the production site  
A3 – Manufacturing processes

The product stage comprises the acquisition of all raw materials, products and energy, transport to the production site, packaging, and waste processing up to the "end-of-waste" state or final disposal. The LCA results are declared in aggregated form for the product stage, which means, that the sub-modules A1, A2 and A3 are declared as one module A1-A3.

The raw materials used in the production of the autoclaved aerated concrete elements has been pre-treated, manufactured, and provided by suppliers. These materials are then dosed and mixed in the mixer to form an aqueous suspension. The mixture is poured into casting molds, where air pores are created with chemical reactions. The homogeneous structure is exposed to a saturated steam atmosphere to form specific characteristic properties for the autoclaved aerated concrete products.

### Construction process stage (A4-A5) includes:

A4 – transport to the building site  
A5 – installation into the building

This includes the provision of all materials, products and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction process stage. The autoclaved aerated concrete blocks are installed manually as predefined elements using no auxiliary materials or machinery. The autoclaved aerated concrete blocks are installed in Europe.

A flat amount of construction waste is assumed for all products equal to 2%, which is added to the output from the production. The declared product is thus the inclusion of the construction waste in the product.

### Use stage (B1-B7) includes:

The use stage, related to the building fabric includes:

B1 - use or application of the installed product  
B2 - maintenance  
B3 - repair  
B4 - replacement  
B5 – refurbishment

The use stage take place in Europe and are related to the operation of the building includes:

B6 - operational energy use  
B7 - operational water use

These information modules include provision and transport of all materials, products, as well as energy and water provisions, waste processing up to the end-of-waste state or disposal of final residues during this part of the use stage.

According to the cPCR these modules do in general not generate relevant environmental impacts and are therefore neglected.

For B1 CO<sub>2</sub>-uptake from carbonation has been calculated based on the reactive CaO specifications on each product and the rate of carbonation set to 95%.

Additionally, the autoclaved aerated concrete blocks contain water that is evaporated during the use phase until each block is in moisture equilibrium with the surrounding atmosphere.

### End of Life (C1-C4) includes:

C1 - de-construction, demolition  
C2 - transport to waste processing  
C3 - waste processing for reuse, recovery and/or recycling  
C4 – disposal

The autoclaved aerated concrete products are assumed demolished using an excavator (C1). Impacts are accounted for in the form of diesel consumption from the excavator used for

demolition, sorting, placement, and additional crushing of autoclaved aerated concrete waste elements in large piles and loading of concrete waste onto a semi-trailer used for the waste transport.

At the recycling facility the autoclaved aerated concrete is crushed (C3), where after 95% are recycled and used as road fill. The remaining 5% of the autoclaved aerated concrete is sent to a local landfill (C4)

**Re-use, recovery, and recycling potential (D) includes:**

Module D includes the reuse, recovery and/or recycling potentials, expressed as net impacts and benefits. These included the energy produced in A5 (incineration of packaging) and substitution of gravel from the recycling of crushed product, however, only the quantity of the product which constitutes primary material. The added recycled materials in the products have not been credited in D.

# LCA results

The tables below cover the H+H autoclaved aerated concrete blocks with a dry density varying from 375 kg/m<sup>3</sup> to 535 kg/m<sup>3</sup>.

AAC 375 means aircrete with a dry density of 375 kg/m<sup>3</sup> and additionally cover the products H+H Celblock 375, H+H Comfortblock 375, and H+H Planstein PP 2/040.

AAC 535 means aircrete with a dry density of 535 kg/m<sup>3</sup> and additionally cover the products H+H Multipladen 535, H+H Murblokken 535, and H+H Planstein PP 4/055.

ENVIRONMENTAL EFFECTS PER PRODUKT PER M <sup>3</sup>											
Parameter	Unit	A1-A3		A4		A5		B1		B2-B7	
		AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535
GWP-total	[kg CO <sub>2</sub> eq.]	1,49E+02	2,21E+02	4,20E+01	5,96E+01	2,13E+00	2,16E+00	-6,48E+01	-1,01E+02	0,00E+00	0,00E+00
GWP-fossil	[kg CO <sub>2</sub> eq.]	1,49E+02	2,21E+02	4,16E+01	5,89E+01	1,46E+00	1,51E+00	-6,48E+01	-1,01E+02	0,00E+00	0,00E+00
GWP-bio	[kg CO <sub>2</sub> eq.]	-3,15E-01	-2,18E-01	1,74E-01	2,47E-01	6,67E-01	6,53E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
GWP-luluc	[kg CO <sub>2</sub> eq.]	3,06E-02	4,82E-02	2,85E-01	4,04E-01	4,26E-04	6,04E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ODP	[kg CFC 11 eq.]	4,60E-07	3,41E-07	4,15E-12	5,88E-12	3,27E-13	3,34E-13	0,00E+00	0,00E+00	0,00E+00	0,00E+00
AP	[mol H+ eq.]	1,38E-01	1,66E-01	4,72E-02	6,69E-02	6,38E-04	6,81E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EP-fw	[kg PO <sub>4</sub> eq.]	1,02E-04	1,25E-04	1,51E-04	2,14E-04	3,04E-07	3,99E-07	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EP-mar	[kg N eq.]	4,02E-02	5,10E-02	1,52E-02	2,15E-02	1,89E-04	2,02E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EP-ter	[mol N eq.]	4,38E-01	5,58E-01	1,82E-01	2,58E-01	2,87E-03	3,02E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00
POCP	[kg NMVOC eq.]	1,15E-01	1,45E-01	4,07E-02	5,76E-02	4,98E-04	5,34E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ADP-mm <sup>1</sup>	[kg Sb eq.]	9,46E-06	1,16E-05	4,26E-06	6,04E-06	1,41E-08	1,69E-08	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ADP-fos <sup>1</sup>	[MJ]	7,95E+02	1,11E+03	5,55E+02	7,87E+02	1,37E+00	1,73E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
WDP <sup>1</sup>	[m3]	2,46E+00	3,01E+00	4,73E-01	6,70E-01	2,16E-01	2,17E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Caption	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-bio = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use										
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator										

ENVIRONMENTAL EFFECTS PER PRODUKT PER M <sup>3</sup>											
Parameter	Unit	C1		C2		C3		C4		D	
		AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535
GWP-total	[kg CO <sub>2</sub> eq.]	5,77E+00	5,77E+00	2,96E+00	4,23E+00	4,18E+00	5,96E+00	1,69E-01	2,41E-01	-1,53E+00	-1,93E+00
GWP-fossil	[kg CO <sub>2</sub> eq.]	5,74E+00	5,74E+00	2,93E+00	4,18E+00	4,14E+00	5,91E+00	1,74E-01	2,48E-01	-1,54E+00	-1,94E+00
GWP-bio	[kg CO <sub>2</sub> eq.]	1,26E-03	1,26E-03	1,23E-02	1,75E-02	1,14E-02	1,62E-02	-5,15E-03	-7,35E-03	1,20E-02	1,94E-02
GWP-luluc	[kg CO <sub>2</sub> eq.]	2,91E-02	2,91E-02	2,01E-02	2,86E-02	2,40E-02	3,43E-02	3,21E-04	4,58E-04	-1,86E-03	-2,90E-03
ODP	[kg CFC 11 eq.]	4,23E-13	4,23E-13	2,93E-13	4,17E-13	3,50E-13	5,00E-13	4,08E-13	5,83E-13	-7,49E-12	-9,75E-12
AP	[mol H+ eq.]	2,78E-02	2,78E-02	3,33E-03	4,75E-03	9,21E-03	1,31E-02	1,23E-03	1,76E-03	-4,31E-03	-6,31E-03
EP-fw	[kg PO <sub>4</sub> eq.]	1,54E-05	1,54E-05	1,06E-05	1,52E-05	1,27E-05	1,82E-05	2,95E-07	4,20E-07	-3,30E-06	-5,06E-06
EP-mar	[kg N eq.]	1,32E-02	1,32E-02	1,07E-03	1,53E-03	3,94E-03	5,62E-03	3,15E-04	4,49E-04	-1,48E-03	-2,17E-03
EP-ter	[mol N eq.]	1,46E-01	1,46E-01	1,28E-02	1,83E-02	4,44E-02	6,34E-02	3,46E-03	4,94E-03	-1,63E-02	-2,39E-02
POCP	[kg NMVOC eq.]	3,69E-02	3,69E-02	2,87E-03	4,09E-03	1,08E-02	1,54E-02	9,57E-04	1,37E-03	-4,08E-03	-5,97E-03
ADP-mm <sup>1</sup>	[kg Sb eq.]	4,35E-07	4,35E-07	3,00E-07	4,28E-07	3,60E-07	5,13E-07	1,78E-08	2,54E-08	-1,85E-07	-2,53E-07
ADP-fos <sup>1</sup>	[MJ]	5,66E+01	5,66E+01	3,91E+01	5,58E+01	4,68E+01	6,68E+01	2,28E+00	3,25E+00	-2,57E+01	-3,17E+01
WDP <sup>1</sup>	[m <sup>3</sup> ]	4,82E-02	4,82E-02	3,33E-02	4,76E-02	3,99E-02	5,69E-02	1,91E-02	2,72E-02	-1,07E-01	-1,52E-01
Caption	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-bio = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use										
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.										

ADDITIONAL ENVIRONMENTAL EFFECTS PER PRODUKT PER M <sup>3</sup>											
Parameter	Unit	A1-A3		A4		A5		B1		B2-B7	
		AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535
PM	[Disease incidence]	2,89E-06	3,88E-06	3,25E-07	4,60E-07	3,91E-09	4,26E-09	0,00E+00	0,00E+00	0,00E+00	0,00E+00
IRP <sup>2</sup>	[kBq U235 eq.]	3,37E+00	3,52E+00	1,56E-01	2,21E-01	1,88E-03	2,00E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00
ETP-fw <sup>1</sup>	[CTUe]	2,17E+02	2,74E+02	3,93E+02	5,57E+02	7,97E-01	1,05E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
HTP-c <sup>1</sup>	[CTUh]	1,65E-08	2,36E-08	8,10E-09	1,15E-08	3,62E-11	4,29E-11	0,00E+00	0,00E+00	0,00E+00	0,00E+00
HTP-nc <sup>1</sup>	[CTUh]	1,14E-06	1,89E-06	4,40E-07	6,23E-07	2,37E-09	2,83E-09	0,00E+00	0,00E+00	0,00E+00	0,00E+00
SQP <sup>1</sup>	-	3,08E+02	3,96E+02	2,35E+02	3,33E+02	5,03E-01	6,51E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)										
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.										
	<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.										

ADDITIONAL ENVIRONMENTAL EFFECTS PER PRODUKT PER M <sup>3</sup>											
Parameter	Unit	C1		C2		C3		C4		D	
		AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535
PM	[Disease incidence]	3,19E-07	3,19E-07	2,29E-08	3,26E-08	9,11E-08	1,30E-07	1,52E-08	2,16E-08	-2,10E-07	-3,25E-07
IRP <sup>2</sup>	[kBq U235 eq.]	1,59E-02	1,59E-02	1,10E-02	1,57E-02	1,32E-02	1,88E-02	2,82E-03	4,02E-03	-3,04E-01	-3,72E-01
ETP-fw <sup>1</sup>	[CTUe]	4,01E+01	4,01E+01	2,77E+01	3,95E+01	3,32E+01	4,73E+01	1,28E+00	1,82E+00	-8,19E+00	-1,15E+01
HTP-c <sup>1</sup>	[CTUh]	8,27E-10	8,27E-10	5,71E-10	8,15E-10	6,84E-10	9,76E-10	1,95E-10	2,78E-10	-5,41E-10	-7,90E-10
HTP-nc <sup>1</sup>	[CTUh]	5,43E-08	5,43E-08	3,10E-08	4,42E-08	3,93E-08	5,60E-08	2,16E-08	3,07E-08	-4,91E-08	-7,42E-08
SQP <sup>1</sup>	-	2,40E+01	2,40E+01	1,66E+01	2,36E+01	1,98E+01	2,83E+01	4,74E-01	6,76E-01	-3,77E+00	-5,51E+00
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)										
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.										
	<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.										



RESSOURCE CONSUMPTION PER PRODUKT PER M <sup>3</sup>											
Parameter	Unit	A1-A3		A4		A5		B1		B2-B7	
		AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535
PERE	[MJ]	1,60E+01	4,76E+01	3,85E+01	5,45E+01	2,09E-01	2,36E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERM	[MJ]	1,48E+02	1,56E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	[MJ]	1,64E+02	2,03E+02	3,85E+01	5,45E+01	2,09E-01	2,36E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRE	[MJ]	7,53E+02	1,07E+03	5,57E+02	7,90E+02	1,37E+00	1,74E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRM	[MJ]	4,23E+01	4,09E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	[MJ]	7,95E+02	1,11E+03	5,57E+02	7,90E+02	1,37E+00	1,74E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
SM	[kg]	4,69E+01	1,86E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	[m3]	6,09E-01	6,41E-01	4,44E-02	6,30E-02	5,15E-03	5,19E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water										

RESSOURCE CONSUMPTION PER PRODUKT PER M <sup>3</sup>											
Parameter	Unit	C1		C2		C3		C4		D	
		AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535
PERE	[MJ]	3,92E+00	3,92E+00	2,71E+00	3,87E+00	3,25E+00	4,63E+00	3,42E-01	4,87E-01	-4,22E+00	-5,98E+00
PERM	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	[MJ]	3,92E+00	3,92E+00	2,71E+00	3,87E+00	3,25E+00	4,63E+00	3,42E-01	4,87E-01	-4,22E+00	-5,98E+00
PENRE	[MJ]	5,68E+01	5,68E+01	3,93E+01	5,60E+01	4,70E+01	6,71E+01	2,28E+00	3,25E+00	-2,57E+01	-3,17E+01
PENRM	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	[MJ]	5,68E+01	5,68E+01	3,93E+01	5,60E+01	4,70E+01	6,71E+01	2,28E+00	3,25E+00	-2,57E+01	-3,17E+01
SM	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	[m3]	4,53E-03	4,53E-03	3,13E-03	4,47E-03	3,75E-03	5,35E-03	5,78E-04	8,25E-04	-4,95E-03	-6,79E-03
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Net use of fresh water										

WASTE CATEGORIES AND OUTPUT FLOWS PER PRODUKT PER M <sup>3</sup>											
Parameter	Unit	A1-A3		A4		A5		B1		B2-B7	
		AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535
HWD	[kg]	2,36E-04	1,41E-07	2,95E-09	4,18E-09	6,24E-11	6,53E-11	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NHWD	[kg]	1,08E+01	1,06E+01	9,07E-02	1,29E-01	2,77E-01	3,79E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RWD	[kg]	2,49E-02	3,05E-02	1,03E-03	1,47E-03	1,81E-05	1,90E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00
CRU	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,68E+00	1,10E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MER	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	[MJ]	8,65E-01	1,18E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	[MJ]	2,04E+00	2,80E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy										

WASTE CATEGORIES AND OUTPUT FLOWS PER PRODUKT PER M <sup>3</sup>											
Parameter	Unit	C1		C2		C3		C4		D	
		AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535	AAC 375	AAC 535
HWD	[kg]	3,01E-10	3,01E-10	2,08E-10	2,96E-10	2,49E-10	3,55E-10	1,17E-10	1,67E-10	-2,48E-09	-2,80E-09
NHWD	[kg]	9,26E-03	9,26E-03	6,40E-03	9,13E-03	7,66E-03	1,09E-02	1,17E+01	1,66E+01	-1,41E+01	-2,21E+01
RWD	[kg]	1,05E-04	1,05E-04	7,29E-05	1,04E-04	8,73E-05	1,25E-04	2,54E-05	3,62E-05	-1,98E-03	-2,39E-03
CRU	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,76E+02	5,37E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MER	[kg]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	[MJ]	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy										

BIOGENIC CARBON CONTENT PER PRODUKT PER M <sup>3</sup>			
Parameter	Unit	At the factory gate	
		AAC 375	AAC 535
Biogenic carbon content in product	kg C	6,40E-01	6,20E-01
Biogenic carbon content in accompanying packaging	kg C	4,53E-00	4,68E-00

# Additional information

## LCA interpretation

LCIA are relative expressions and do not predict impacts category endpoints, the exceeding of thresholds, safety margins or risks. To understand which processes, contribute the most to the overall impacts, a process contribution analysis was conducted. In the tables presented below, the processes contributing the most to each specific impact category is presented.

**Process contributions for AAC 375, Planstein PP/040**

Impact Category	Unit	Maximum contribution on category	% of category	Process
GWP-total	[kg CO2 eq.]	75,20	54%	A1: Cement
GWP-fossil	[kg CO2 eq.]	74,95	54%	
GWP-bio emission	[kg CO2 eq.]	0,69	124%	A3: Packaging
GWP-bio uptake	[kg CO2 eq.]	-0,70	-126%	
GWP-luluc	[kg CO2 eq.]	0,205	53%	A4: Transport to the construction site
ODP	[kg CFC 11 eq.]	4,60E-07	100%	A1: Mould oil
AP	[mol H+ eq.]	0,0596	27%	A1: Cement
EP-fw	[kg PO4 eq.]	0,0001	38%	A4: Transport to the construction site
EP-mar	[kg N eq.]	0,0174	24%	
EP-ter	[mol N eq.]	0,1891	23%	A1: Cement
POCP	[kg NMVOC eq.]	0,0527	26%	
ADP-mm	[kg Sb eq.]	0,0000	21%	A4: Transport to the construction site
ADP-fos	[MJ]	399,00	27%	
WDP	[m3]	0,79	25%	A1: Cement

**Process contributions for AAC 535, Planstein PP/055**

Impact Category	Unit	Maximum contribution on category	% Of category	Process
GWP-total	[kg CO2 eq.]	81,10	41%	A1: Cement
GWP-fossil	[kg CO2 eq.]	80,83	42%	
GWP-bio emission	[kg CO2 eq.]	0,99	136%	A3: Packaging
GWP-bio uptake	[kg CO2 eq.]	-1,00	-137%	
GWP-luluc	[kg CO2 eq.]	0,292	54%	A4: Transport to the construction site
ODP	[kg CFC 11 eq.]	3,40E-07	100%	A1: Mould oil
AP	[mol H+ eq.]	0,0643	23%	A1: Cement
EP-fw	[kg PO4 eq.]	0,0002	40%	A4: Transport to the construction site
EP-mar	[kg N eq.]	0,0187	20%	
EP-ter	[mol N eq.]	0,2039	20%	A1: Cement
POCP	[kg NMVOC eq.]	0,0568	22%	
ADP-mm	[kg Sb eq.]	0,0000	23%	A4: Transport to the construction site
ADP-fos	[MJ]	569,24	28%	
WDP	[m3]	0,85	22%	A1: Cement

Most of the environmental impacts come from the production of raw materials in module A1. The results show that the production of cement is the dominating process in most of the environmental impact categories, by contributing between 20% and 54% to the total impacts. The production of cement specifically makes up 54% and 41% of the total Climate Change impact for AAC block 375 and 535 kg/m<sup>3</sup>, respectively.

The results are relative contributions. Some processes have a summarized negative result despite individual processes contributing positively to the impact category. This result in some percentages reaching below 0% and above 100%.

## Technical information on scenarios

### Transport to the building site (A4)

Scenario information	Value	Unit
Fuel type	Diesel (0,021 l/tkm)	-
Vehicle type	Euro 6, 28 - 32t gross weight / 22t payload capacity	-
Transport distance	1000	km
Capacity utilisation (including empty runs)	61	%
Gross density of products transported	-	kg/m <sup>3</sup>
Capacity utilisation volume factor	1	-

### Installation of the product in the building (A5)

Scenario information	AAC 375 Planstein PP/040	AAC 535 Planstein PP/055	Unit
Waste materials (autoclaved aerated concrete block)	7	11	kg
Waste materials (packaging)	2	1	Kg

### Reference service life

RSL information	Unit
Reference service Life	80 Years
Declared product properties	Technical specifications and guidance can be obtained from direct contact to H+H at Nordics: +45 7024 0050 Germany: +49 211 298800 00
Design application parameters	
Assumed quality of work	
Outdoor environment	
Indoor environment	
Usage conditions	
Maintenance	

### Use (B1-B7)

Scenario information	AAC 375 Planstein PP/040	AAC 535 Planstein PP/055	Unit
Carbonation	64,8	101,2	kg CO <sub>2</sub> -eq

### End of life (C1-C4)

Scenario information	AAC 375 Planstein PP/040	AAC 535 Planstein PP/055	Unit
Collected separately	388	554	kg
Collected with mixed waste	0	0	kg
For reuse	0	0	kg
For recycling	377	537	kg
For energy recovery	0	0	kg
For final disposal	11	17	kg
Assumptions for scenario development	Assumed dismantled using an excavator.		

### Re-use, recovery, and recycling potential (D)

Scenario information/Materiel	AAC 375 Planstein PP/040	AAC 535 Planstein PP/055	Unit
Roadfill	331	519	kg

### Indoor air

The EPD does not give information on release of dangerous substances to indoor air because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A2 chapter 7.4.1.

### Soil and water

The EPD does not give information on release of dangerous substances to soil and water because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A2 chapter 7.4.2.

## References

<b>Publisher</b>	 <a href="http://www.epddanmark.dk">www.epddanmark.dk</a>
<b>Programme operator</b>	Danish Technological Institute Buildings & Environment Gregersensvej DK-2630 Taastrup <a href="http://www.teknologisk.dk">www.teknologisk.dk</a>
<b>LCA-practitioner</b>	Asger Alexander Wendt Karl & Maria Preilev Hansen Danish Technological Institute Buildings & Environment Gregersensvej DK-2630 Taastrup <a href="http://www.teknologisk.dk">www.teknologisk.dk</a>
<b>LCA software /background data</b>	Thinkstep GaBi 10.6 Database version 2021.2 <a href="http://www.gabi-software.com">www.gabi-software.com</a>
<b>3<sup>rd</sup> party verifier</b>	Ninkie Bendtsen NIRAS A/S Sortemosevej 19 DK-3450 Allerød <a href="http://www.niras.dk">www.niras.dk</a>

### General programme instructions

General Programme Instructions, version 2.0, spring 2020, [www.epddanmark.dk](http://www.epddanmark.dk)

#### EN 15804

DS/EN 15804 + A2:2019 - "Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products"

#### EN 16757

DS/EN 16757:2022 - "Bæredygtighed indenfor byggeri og anlæg - Miljøvaredeklarationer - Produktkategoriregler for beton og betonelementer"

#### EN 15942

DS/EN 15942:2011 - "Sustainability of construction works – Environmental product declarations – Communication format business-to-business"

#### ISO 14025

DS/EN ISO 14025:2010 - "Environmental labels and declarations – Type III environmental declarations – Principles and procedures"

#### ISO 14040

DS/EN ISO 14040:2008 - "Environmental management – Life cycle assessment – Principles and framework"

#### ISO 14044

DS/EN ISO 14044:2008 - "Environmental management – Life cycle assessment – Requirements and guidelines"