



Multi-User Telecommunications Outlet (MUTO) - Mini Sliding

The AFL Mini Sliding MUTO is specifically designed for the direct termination of fibre and copper UTP cables. Incorporated are security features which make it well suited for security managed fibre-to-the-desk environments such as Government and Defence. MUTOs provide a consolidation point for single or multiple cables running between a floor distribution room and interconnect to a work area via a patch cord. Available in various colours to comply with the Australian Government Information Security Manual (ISM).

Features

- Compact size for greater versatility
- Clear polycarbonate cover
- Security features including provisions for anti-tamper security seal
- Thick gauge mild steel construction with knockout adapter and cable openings
- Configurations available to splice up to 24 fibres or terminate up to 6 x RJ45
- Cable entry holes for wall mounted and concealed cable entry
- Internal fibre management and cable strain relief

Applications

- Remote cable terminations within building
- Defence requirements for identifying tampering or accidental fibre disconnections
- Fibre-to-the-desk (FTTD) applications
- Suitable for direct termination of riser fibre cable and UTP copper cable

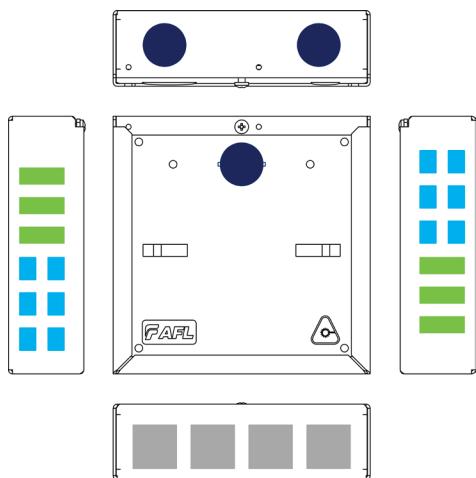
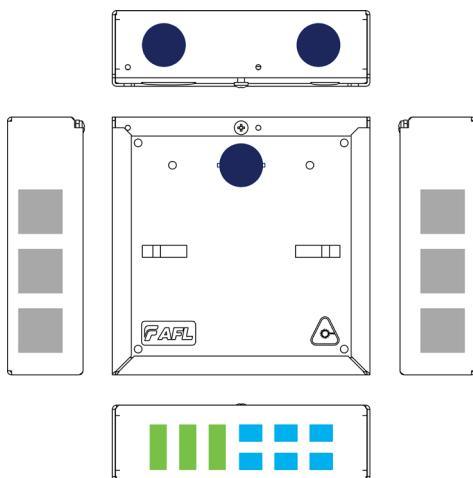
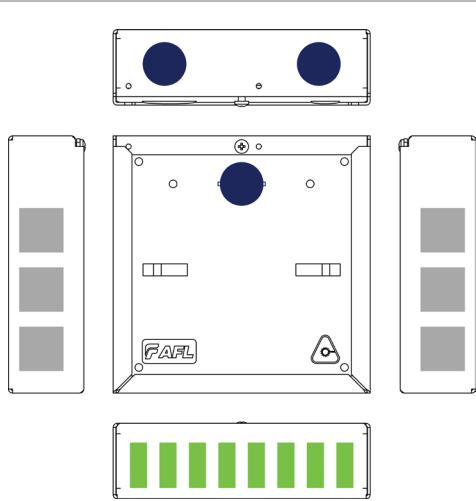
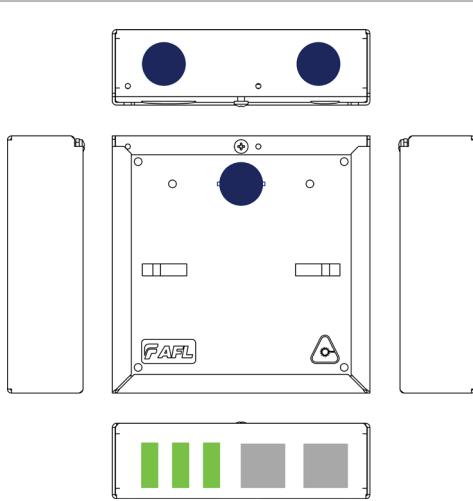
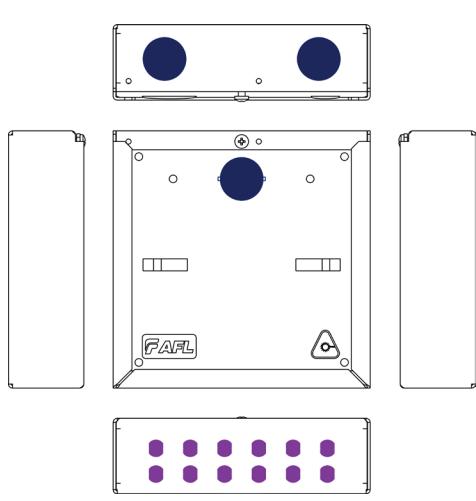
Technical Specifications

Dimensions (mm)	150 (H) x 150 (W) x 44 (D)
Weight	0.8 kg (unloaded)
Material	
- Body	Powder-coated 1.6 mm Mild Steel sheet
- Cover	2.0 mm Polycarbonate cover
Connector Type	Various configurations to suit SC, LCD, SCD, LCQ, ST, and RJ45 outlets.
Cable Entry	2 x 25 mm (wall mount) 1 x 25 mm (concealed entry)
Ingress Protection	IP20
Standard Accessories	2 x nylon cable saddles, polycarbonate cover with laser warning triangle, M4 x 6 mm Phillips screw

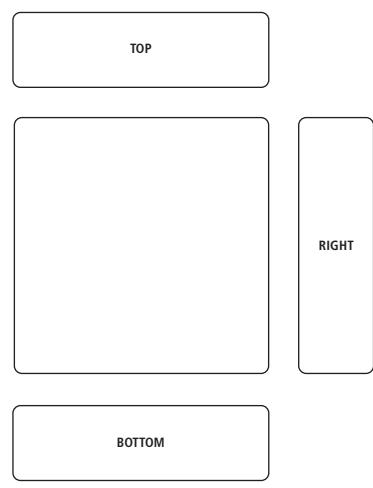
PART NUMBER	DESCRIPTION	QTY OF KNOCKOUT PORTS*				FIG.
		SCD/LCQ	SC/LCD	ST/FC	RJ45	
FWE-MS6SCDK12SCK4RJK-xx	Mini Wall Box S/Lid 6 X SCD K/O 12 X SC K/O 4 X RJ, xx	6	12	-	4	01
FWE-MS3SCDK6SCK6RJK-xx	Mini Wall Box S/Lid 3 X SCD 6 X SC 6 X RJ45, xx	3	6	-	6	02
FWE-MS3SCDK2RJK-xx	Mini Wall Box S/Lid 3 X SCD & 2 X RJ45 K/O, xx	3	-	-	2	03
FWE-MS8SCDK4RJK-xx	Mini Wall Box S/Lid 8 X SCD & 4 X RJ45 K/O, xx	8	-	-	4	04
FWE-MS12STK-xx	Mini Wall Box S/Lid 12 X ST K/O, xx	-	-	12	-	05

Replace xx in the part number with the following colour codes: RD = Red, PK = Pink, GN = Green, BU = Blue, BL = Black, WH = White, OR = Orange, GY = Grey, YL = Yellow, VLT = Dark violet (MOQ may apply)

Multi-User Telecommunications Outlet (MUTO) - Mini Sliding

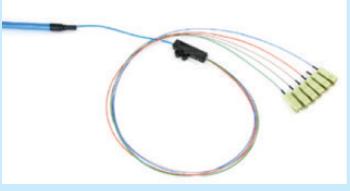
FIG.01

FIG.02

FIG.03

FIG.04

FIG.05

KNOCKOUT

SC/LCD	SCD/LCQ
SC	LCD
SCD	LCQ
RJ45	
ST/FC	
25 mm	



Multi-User Telecommunications Outlet (MUTO) - Mini Sliding

Accessories (Ordered Separately)

PART NUMBER	DESCRIPTION	
FWE-MS-ACCKIT-12BU	MUTO Kit including comb, protectors, saddles, anchor and screw	
Refer to respective Product Guide	Adapters (Suitable for SC, LCD, SCD and LCQ reduced flange only)	
	Shutters	
	RJ45 Outlets, Adaptor & Bezels	
	Pigtails	
	Contact Sales Team	
FANKIT-T-6C-0.6M	6F Loose-Tube Fanout Kit	
FANKIT-T-12C-0.6M	12F Loose-Tube Fanout Kit, tube fixing	
Refer to respective Product Guide	Field Installable Connectors	