


# Type DPL Compression Terminal Lug

A precision made compression terminal lug for a full range of conductor sizes with 1, 2, and 4 hole pads in the larger sizes. Made of tin coated pure copper with a minimum conductivity of 98% I.A.C.S. Conductor is secured by identifying the barrel with any standard compression tool made for electrical lugs.

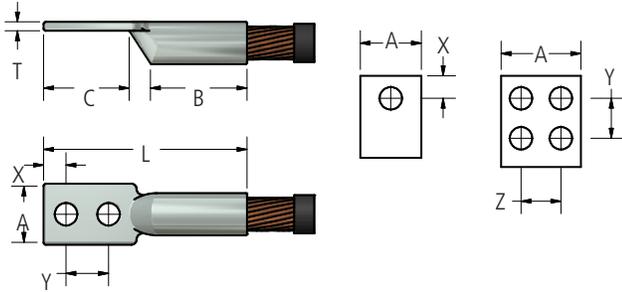

## Ordering Information

Catalog Number	Cable Size D	Screw Size	No. of Holes in Pad	No. of Indents B/B1	Dimensions in inches						
					A	B	C	L	T	X	Y & Z
DPL1-1	#8 STR	#10	1	1	11/32	7/16	1/2	1 1/8	5/64	7/32	-
DPL2-1	#6 STR	1/4	1	1	11/32	1 1/8	1/2	1 13/16	3/32	1/4	-
DPL2-2	#6 STR	1/4	2	1	11/32	1 1/8	1 3/16	2 1/2	3/32	1/4	5/8
DPL4-1	#4 STR	1/4	1	1	1/2	1 1/8	1/2	1 13/16	3/32	1/4	-
DPL4-2	#4 STR	1/4	2	1	1/2	1 1/8	1 3/16	2 1/2	3/32	1/4	5/8
DPL5-1	#3 STR	5/16	1	1	17/32	1 1/4	3/4	2 1/4	3/32	3/8	-
DPL5-2	#3 STR	5/16	2	1	17/32	1 1/4	1 1/2	2 15/16	3/32	11/32	3/4
DPL6-1	#2 STR	5/16	1	1	19/32	1 1/4	3/4	2 1/4	7/64	3/8	-
DPL6-2	#2 STR	5/16	2	1	19/32	1 1/4	1 1/2	2 15/16	7/64	11/32	3/4
DPL8-1	#1 STR	5/16	1	1	11/16	1 3/8	3/4	2 3/8	7/64	3/8	-
DPL8-2	#1 STR	5/16	2	1	11/16	1 3/8	1 5/8	3 1/4	7/64	11/32	7/8
DPL10-1	1/0 STR	5/16	1	1	3/4	1 3/8	3/4	2 11/16	1/8	3/8	-
DPL10-2	1/0 STR	5/16	2	1	3/4	1 3/8	1 5/8	3 7/16	1/8	11/32	7/8
DPL13-1	2/0 STR	3/8	1	1	13/16	1 1/2	7/8	2 13/16	1/8	7/16	-
DPL13-2	2/0 STR	5/16	2	1	13/16	1 1/2	1 5/8	3 5/8	1/8	11/32	7/8
DPL17-1	3/0 STR	1/2	1	1	29/32	1 1/2	1	3	1/8	1/2	-
DPL17-2	3/0 STR	3/8	2	1	29/32	1 1/2	1 13/16	3 13/16	1/8	3/8	1
DPL21-1	4/0 STR	1/2	1	1	1	1 5/8	1	3 3/16	9/64	1/2	-
DPL21-2	4/0 STR	3/8	2	1	1	1 5/8	1 13/16	3 15/16	9/64	3/8	1
DPL25-1	250 MCM	1/2	1	1	1 3/32	1 5/8	1 1/8	3 9/16	5/32	9/16	-
DPL25-2	250 MCM	3/8	2	1	1 3/32	1 5/8	1 7/8	4 5/16	5/32	3/8	1 1/16
DPL30-1	300 MCM	1/2	1	2	1 3/16	2	1 1/8	3 9/16	5/32	9/16	-
DPL30-2	300 MCM	3/8	2	2	1 3/16	2	1 7/8	4 5/16	5/32	3/8	1 1/16
DPL35-1	350 MCM	1/2	1	2	1 9/32	2	1 1/8	3 9/16	3/16	9/16	-
DPL35-2	350 MCM	3/8	2	2	1 9/32	2	1 7/8	4 5/16	3/16	3/8	1 1/16

AFL's Dossert® product line offers a wide range of substation accessories in low voltage up to 765 kV applications in bronze or aluminum materials.

# Type DPL Compression Terminal Lug

Catalog Number	Cable Size D	Screw Size	No. of Holes in Pad	No. of Indents B/B1	Dimensions in inches						
					A	B	C	L	T	X	Y & Z
DPL40-1	400 MCM	5/8	1	2	1 13/32	2 1/8	1 1/2	4 1/4	3/16	3/4	-
DPL40-2	400 MCM	3/8	2	2	1 13/32	2 1/8	2	4 3/4	3/16	7/16	1 1/16
DPL 50-1	500 MCM	5/8	1	2	1 17/32	2 1/4	1 1/2	4 3/8	1/4	3/4	-
DPL 50-2	500 MCM	3/8	2	2	1 17/32	2 1/4	2	4 7/8	1/4	7/16	1 1/16
DPL 55-1	550 MCM	5/8	1	2	1 5/8	2 5/8	1 5/8	4 15/16	1/4	13/16	-
DPL 55-2	550 MCM	3/8	2	2	1 5/8	2 5/8	2 1/16	5 3/8	1/4	7/16	1 1/8
DPL 60-1	600 MCM	5/8	1	2	1 3/4	2 11/16	1 3/4	5 1/8	9/32	7/8	-
DPL 60-2	600 MCM	3/8	2	2	1 3/4	2 11/16	2 1/16	5 7/16	9/32	7/16	1 1/8
DPL 65-1	650 MCM	5/8	1	2	1 25/32	2 13/16	1 3/4	5 5/16	9/32	7/8	-
DPL 65-2	650 MCM	3/8	2	2	1 25/32	2 13/16	2 3/16	5 3/4	9/32	1/2	1 1/8
DPL 75-1	750 MCM	5/8	1	2	1 29/32	2 7/8	1 15/16	5 5/8	9/32	7/8	-
DPL 75-2	750 MCM	3/8	2	2	1 29/32	2 7/8	2 3/16	5 7/8	9/32	1/2	1 1/8
DPL 80-1	800 MCM	5/8	1	2	1 31/32	2 15/16	1 15/16	5 11/16	5/16	15/16	-
DPL 80-2	800 MCM	3/8	2	2	1 31/32	2 15/16	2 3/16	5 15/16	5/16	1/2	1 1/8
DPL 85-1	850 MCM	5/8	1	2	2	2 15/16	1 15/16	5 11/16	5/16	15/16	-
DPL 85-2	850 MCM	3/8	2	2	2	2 15/16	2 3/16	5 15/16	5/16	1/2	1 1/8
DPL 85-2-S50	850 MCM	1/2	2	2	2	2 15/16	3	6 3/4	5/16	5/8	1 3/4
DPL 100-1	1000 MCM	5/8	1	2	2 3/16	3	2 1/8	6	11/32	15/16	-
DPL 100-2	1000 MCM	1/2	2	2	2 3/16	3	2 7/16	6 5/16	11/32	9/16	1 1/4
DPL 100-2-S50	1000 MCM	1/2	2	2	2 3/16	3	3	6 7/8	11/32	5/8	1 3/4
DPL 100-4	1000 MCM	3/8	4	2	2 3/16	3	2 3/16	6 1/16	11/32	1/2	1 1/8
DPL 125-1	1250 MCM	3/4	1	2	2 13/32	3 3/16	2 1/8	6 3/8	3/8	1 1/16	-
DPL 125-2	1250 MCM	1/2	2	2	2 13/32	3 3/16	2 5/8	6 7/8	3/8	9/16	1 3/8
DPL 125-2-S50	1250 MCM	1/2	2	2	2 13/32	3 3/16	3	7 1/4	3/8	5/8	1 3/4
DPL 125-4	1250 MCM	1/2	4	2	2 13/32	3 3/16	2 5/8	6 7/8	3/8	9/16	1 3/8
DPL 130-1	1300 MCM	3/4	1	2	2 17/32	3 3/16	2 1/8	6 1/2	13/32	1 1/16	-
DPL 130-2	1300 MCM	1/2	2	2	2 17/32	3 3/16	2 5/8	7	13/32	9/16	1 3/8
DPL 130-2-S50	1300 MCM	1/2	2	2	2 17/32	3 3/16	3	7 3/8	13/32	5/8	1 3/4
DPL 150-1	1500 MCM	3/4	1	2	2 11/16	3 3/16	2 5/8	6 11/16	13/32	1 1/8	-
DPL 150-2	1500 MCM	1/2	2	2	2 11/16	3 3/16	2 1/4	7 1/16	13/32	9/16	1 3/8
DPL 150-2-S50	1500 MCM	1/2	2	2	2 11/16	3 3/16	3	7 1/16	13/32	5/8	1 3/4
DPL 150-4	1500 MCM	1/2	4	2	2 11/16	3 3/16	2 5/8	7 1/16	13/32	9/16	1 3/8
DPL 175-1	1750 MCM	3/4	1	2	2 7/8	3 7/16	2 1/4	7 1/4	7/16	1 1/8	-
DPL 175-2	1750 MCM	1/2	2	2	2 7/8	3 7/16	2 3/4	7 3/4	7/16	9/16	1 1/2
DPL 175-2-S50	1750 MCM	1/2	2	2	2 7/8	3 7/16	3	8	7/16	5/8	1 3/4
DPL 175-4	1750 MCM	1/2	4	2	2 7/8	3 7/16	2 3/4	7 3/4	7/16	9/16	1 1/2
DPL 200-1	2000 MCM	3/4	1	2	3 3/32	3 7/16	2 3/8	7 7/16	15/32	13/16	-
DPL 200-2	2000 MCM	1/2	2	2	3 3/32	3 7/16	2 3/4	7 13/16	15/32	9/16	1 1/2
DPL 200-2-S50	2000 MCM	1/2	2	2	3 3/32	3 7/16	3	8 1/16	15/32	5/8	1 3/4
DPL 200-4	2000 MCM	1/2	4	2	3 3/32	3 7/16	2 3/4	7 13/16	15/32	9/16	1 1/2