

ENTRY DOORS

Dimensions & Specifications Guide





With Andersen, create an entry door with character and handcrafted origins, built in solid fine-grain wood. Styled to suit you perfectly. One of a kind. Like your home. And like you.



EXTERIOR & INTERIOR OPTIONS

Make a bold first impression with color – choose from 50 commercial-grade, aluminum exterior color options or a selection of anodized finishes for a rich, lustrous metallic appearance. On the interior of the door, choose from our painted options or enjoy the look of unfinished wood. For a unique look, custom colors are available on the interior or exterior of the door.

ALUMINUM-CLAD EXTERIOR COLORS

Colony White	White	Abalone	Balsa White	Canvas	Maple Syrup	Harvest Gold	Prairie Grass	Flagstone	Sandtone	Pebble Tan	Carmel	Terratone	Hot Chocolate
Bourbon	Acorn	Coffee Bean	Cocoa Bean	Sierra Bronze	Dark Bronze	Clay Canyon	Red Rock	Cardinal	Bing Cherry	Fire Engine Red	Cinnamon Toast	Olive	Sage
Billiard Green	Moss	Forest Green	Mallard Green	Spearmint	Aquamarine	Patina	Sky Blue	Country Blue	Blue Denim	Watercolor Blue	Caribbean Blue	Slate	Moody Blue
Stormy Blue	Dove Gray	Harbor Mist	Yorktown Pewter	Smokey Gray	Mystic Gray	Dark Ash	Black						

INTERIOR & EXTERIOR WOOD SPECIES

Walnut	Mahogany*	Oak	Alder	Cherry	White Oak	Hickory	Mixed Grain Douglas Fir	Maple	Vertical Grain Douglas Fir	Pine

INTERIOR PAINTED COLORS

White	Birch Bark	Primed (for paint)	Canvas	Prairie Grass	Sandtone	Terratone	Cocoa Bean	Dark Bronze	Red Rock	Forest Green	Dove Gray	Black	Anodized Silver

Available on pine. Black and dark bronze also available on maple. Anodized silver available only on maple.

*Actual wood species is either Sapele or Sipo, both non-endangered species grown in Africa, with color and characteristics similar to Central American mahoganies. Naturally occurring variations in grain, color and texture of wood makes each window or door one of a kind. Printing limitations prevent exact duplication of colors and finishes. Please see your Andersen supplier for actual color and finish samples.

OPTIONS & ACCESSORIES

HARDWARE*

Choose from Andersen® hardware or have your door prepped for hardware manufactured by others.



YUMA®

Distressed Bronze
Distressed Nickel



ENCINO®

Distressed Bronze
Distressed Nickel



NEWBURY®

Antique Brass
Bright Brass
Oil Rubbed Bronze
Satin Nickel



ALBANY

Black
Stone
White



ANVERS®

Bright Brass
Oil Rubbed Bronze
Satin Nickel



TRIBECA®

Black
Stone
White

FSB® HARDWARE†

Durable FSB hinged door hardware features clean lines and a sleek finish for a thoroughly modern look.



1035



1075



1076



1102**

Black Anodized Aluminum
Satin Stainless Steel

Satin Stainless Steel

YALE® ASSURE LOCK®*

The Yale Assure Lock† allows you to monitor, lock and unlock your door from anywhere.



Black



Satin Nickel



White

Bold name denotes finish shown.

GRILLE OPTIONS

Grilles patterns and types are shown below and are available in four standard widths: ¾", 7/8", 1 ⅛" and 1 ½".



Colonial



Prairie




Specified
Equal Light




Full Divided Light

Permanent exterior
Permanent interior with spacer




Simulated Divided Light

Permanent exterior
Permanent interior



Removable Interior

Removable interior



Simulated Divided Light with Removable Interior Grilles

Permanent exterior
Removable interior

*Hardware sold separately.

**FSB style 1102 is not available in black anodized aluminum.

†Available on select hinged doors, see your Andersen supplier for details.

Tribeca and Albany hardware are zinc die cast with powder-coated durable finish.

Yuma, Encino, Newbury and Anvers are solid forged brass. FSB is stainless steel or aluminum.

Distressed bronze and oil rubbed bronze are "living" finishes that will change with time and use.

Bright brass and satin nickel finishes on patio door hardware feature a 10-year limited warranty.

Printing limitations prevent exact finish replication. See your Andersen supplier for actual finish samples.


"FSB" is a registered trademark of Franz Schneider Brakel GmbH & Co.

Yale manufactures and supports the limited warranty for Yale Assure Lock for Andersen doors.

DOOR STYLES

Enhance your curb appeal by choosing from a variety of door styles to fit your taste. All styles are offered as single or double doors. Please visit andersenwindows.com/entry doors to see all styles.


STRAIGHTLINE – GLASS PANEL

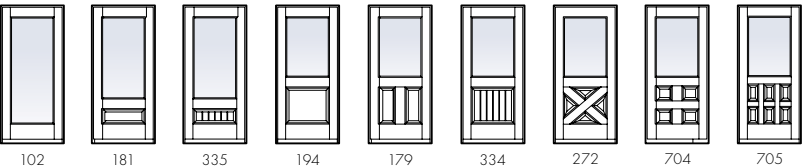


ARTS & CRAFTS




STRAIGHTLINE – FULL PANEL

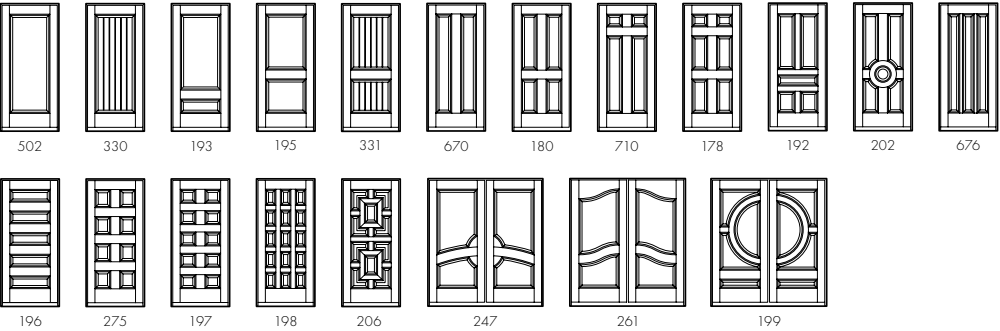


ARCH – GLASS PANEL

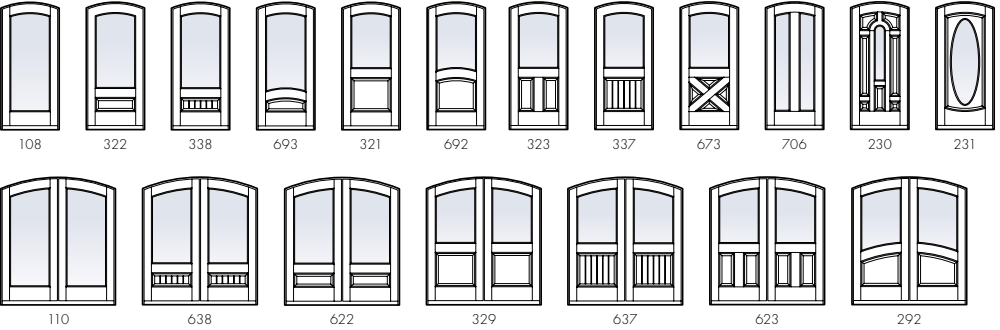


ARCH – FULL PANEL

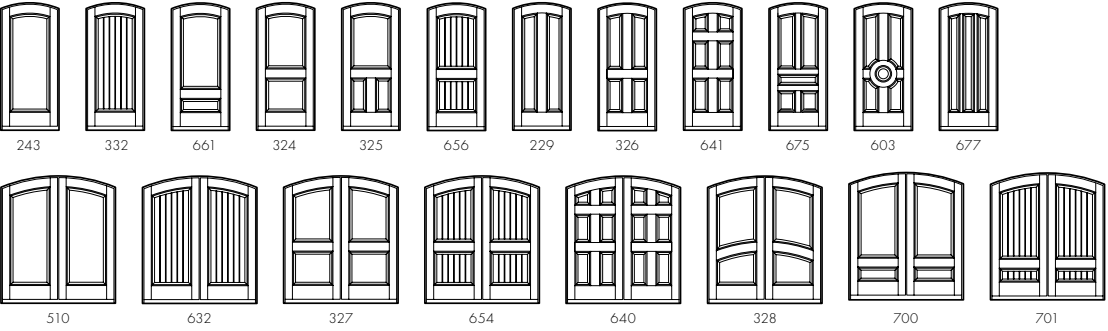

SIDELIGHTS

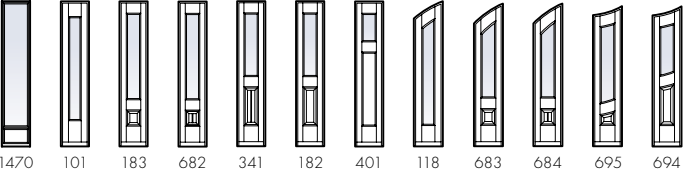


TRANSOMS




RESIDENTIAL ENTRY DOORS

Rectangular Entry Door Order Designation Description

Viewed from the exterior.

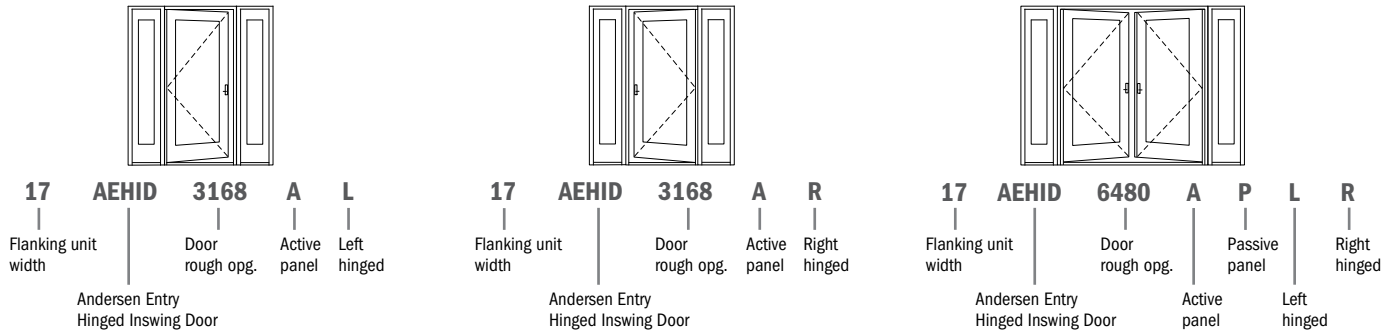

Inswing entry doors (AEHID) shown above, for outswing entry doors use AEOD. Outswing entry doors open outward to the exterior.

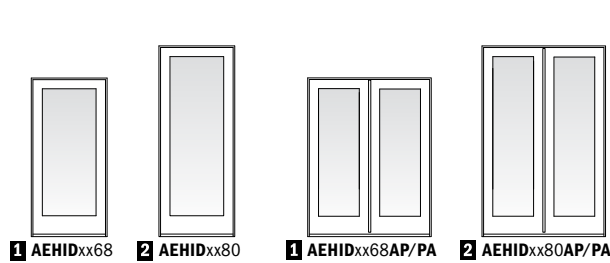


Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. AEHID2068S or AEHID4068SS).

Rectangular Inswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions		Min. Rough Opening		Clear Opening Sq. Ft./ (m ²)	Clear Opening Maximums			Vent Sq. Ft./ (m ²)	Overall Door Area Sq. Ft./ (m ²)
		Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AEHID2068	1	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.56 (1.17)	20 13/16" (529)	22 7/8" (581)	79 1/16" (2008)	12.56 (1.17)	14.63 (1.36)
AEHID2668	1	31 11/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	15.85 (1.47)	26 13/16" (681)	28 7/8" (733)	79 1/16" (2008)	15.85 (1.47)	18.04 (1.68)
AEHID2868	1	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	16.95 (1.57)	28 13/16" (732)	30 7/8" (784)	79 1/16" (2008)	16.95 (1.57)	19.18 (1.78)
AEHID3068	1	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	19.15 (1.78)	32 13/16" (833)	34 7/8" (886)	79 1/16" (2008)	19.15 (1.78)	21.46 (1.99)
AEHID3668	1	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	22.44 (2.08)	38 13/16" (986)	40 7/8" (1038)	79 1/16" (2008)	22.44 (2.08)	24.88 (2.31)
AEHID2080	1	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.62 (1.36)	20 13/16" (529)	22 7/8" (581)	92 1/16" (2338)	14.62 (1.36)	16.95 (1.57)
AEHID2680	1	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	18.46 (1.71)	26 13/16" (681)	28 7/8" (733)	92 1/16" (2338)	18.46 (1.71)	20.90 (1.94)
AEHID2880	1	33 11/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	19.74 (1.83)	28 13/16" (732)	30 7/8" (784)	92 1/16" (2338)	19.74 (1.83)	22.22 (2.06)
AEHID3080	1	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	22.30 (2.07)	32 13/16" (833)	34 7/8" (886)	92 1/16" (2338)	22.30 (2.07)	24.86 (2.31)
AEHID3680	1	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	26.13 (2.43)	38 13/16" (986)	40 7/8" (1038)	92 1/16" (2338)	26.13 (2.43)	28.82 (2.68)
AEHID4068	2	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	26.32 (2.45)	43 13/16" (1113)	47 15/16" (1218)	79 1/16" (2008)	26.32 (2.45)	28.90 (2.68)
AEHID4068	1	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	12.59 (1.17)	20 7/8" (530)	22 15/16" (583)	79 1/16" (2008)	12.59 (1.17)	28.90 (2.68)
AEHID5068	2	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	32.91 (3.06)	55 13/16" (1418)	59 15/16" (1522)	79 1/16" (2008)	32.91 (3.06)	35.73 (3.32)
AEHID5068	1	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	15.89 (1.48)	26 7/8" (683)	28 15/16" (735)	79 1/16" (2008)	15.89 (1.48)	35.73 (3.32)
AEHID5468	2	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	35.10 (3.26)	59 13/16" (1519)	63 15/16" (1624)	79 1/16" (2008)	35.10 (3.26)	38.01 (3.53)
AEHID5468	1	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	16.99 (1.58)	28 7/8" (733)	30 15/16" (786)	79 1/16" (2008)	16.99 (1.58)	38.01 (3.53)
AEHID6068	2	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	39.50 (3.67)	67 13/16" (1722)	71 15/16" (1827)	79 1/16" (2008)	39.50 (3.67)	42.57 (3.95)
AEHID6068	1	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	19.18 (1.78)	32 7/8" (835)	34 15/16" (887)	79 1/16" (2008)	19.18 (1.78)	42.57 (3.95)
AEHID7068	2	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	46.09 (4.28)	79 13/16" (2027)	83 15/16" (2132)	79 1/16" (2008)	46.09 (4.28)	49.40 (4.59)
AEHID7068	1	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	22.48 (2.09)	38 7/8" (987)	40 15/16" (1040)	79 1/16" (2008)	22.48 (2.09)	49.40 (4.59)
AEHID4080	2	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	30.65 (2.85)	43 13/16" (1113)	47 15/16" (1218)	92 1/16" (2338)	30.65 (2.85)	33.48 (3.11)
AEHID4080	1	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	14.66 (1.36)	20 7/8" (530)	22 15/16" (583)	92 1/16" (2338)	14.66 (1.36)	33.48 (3.11)
AEHID5080	2	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	38.32 (3.56)	55 13/16" (1418)	59 15/16" (1522)	92 1/16" (2338)	38.32 (3.56)	41.40 (3.85)
AEHID5080	1	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	18.50 (1.72)	26 7/8" (683)	28 15/16" (735)	92 1/16" (2338)	18.50 (1.72)	41.40 (3.85)
AEHID5480	2	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	40.88 (3.80)	59 13/16" (1519)	63 15/16" (1624)	92 1/16" (2338)	40.88 (3.80)	44.04 (4.09)
AEHID5480	1	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	19.78 (1.84)	28 7/8" (733)	30 15/16" (786)	92 1/16" (2338)	19.78 (1.84)	44.04 (4.09)
AEHID6080	2	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	45.99 (4.27)	67 13/16" (1722)	71 15/16" (1827)	92 1/16" (2338)	45.99 (4.27)	49.31 (4.58)
AEHID6080	1	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	22.34 (2.08)	32 7/8" (835)	34 15/16" (887)	92 1/16" (2338)	22.34 (2.08)	49.31 (4.58)
AEHID7080	2	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	53.66 (4.99)	79 13/16" (2027)	83 15/16" (2132)	92 1/16" (2338)	53.66 (4.99)	57.23 (5.32)
AEHID7080	1	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	26.17 (2.43)	38 7/8" (987)	40 15/16" (1040)	92 1/16" (2338)	26.17 (2.43)	57.23 (5.32)

- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.
- *For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

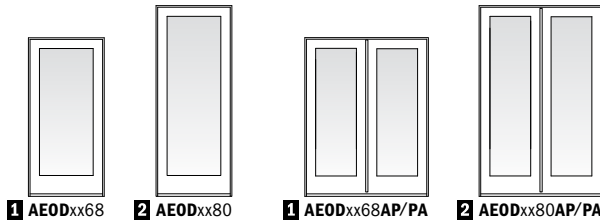

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. **AEOD2068S** or **AEOD4068SS**).

Rectangular Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions		Min. Rough Opening		Clear Opening Sq. Ft./ (m ²)	Clear Opening Maximums				Vent Sq. Ft./ (m ²)	Overall Door Area Sq. Ft./ (m ²)
		Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)			
AEOD2068	1	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.68 (1.18)	21 1/8" (537)	23 1/16" (586)	79 3/16" (2011)	12.58 (1.17)	14.63 (1.36)	
AEOD2668	1	31 11/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	15.98 (1.48)	27 1/8" (689)	29 1/16" (738)	79 3/16" (2011)	15.82 (1.47)	18.04 (1.68)	
AEOD2868	1	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	17.08 (1.59)	29 1/8" (740)	31 1/16" (789)	79 3/16" (2011)	16.89 (1.57)	19.18 (1.78)	
AEOD3068	1	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	19.28 (1.79)	33 1/8" (841)	35 1/16" (891)	79 3/16" (2011)	19.00 (1.77)	21.46 (1.99)	
AEOD3668	1	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	22.58 (2.10)	39 1/8" (994)	41 1/16" (1043)	79 3/16" (2011)	22.13 (2.06)	24.88 (2.31)	
AEOD2080	1	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.76 (1.37)	21 1/8" (537)	23 1/16" (586)	92 3/16" (2342)	14.66 (1.36)	16.95 (1.57)	
AEOD2680	1	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	18.61 (1.73)	27 1/8" (689)	29 1/16" (738)	92 3/16" (2342)	18.45 (1.71)	20.90 (1.94)	
AEOD2880	1	33 11/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	19.89 (1.85)	29 1/8" (740)	31 1/16" (789)	92 3/16" (2342)	19.69 (1.83)	22.22 (2.06)	
AEOD3080	1	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	22.45 (2.09)	33 1/8" (841)	35 1/16" (891)	92 3/16" (2342)	22.17 (2.06)	24.86 (2.31)	
AEOD3680	1	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	26.29 (2.44)	39 1/8" (994)	41 1/16" (1043)	92 3/16" (2342)	25.84 (2.40)	28.82 (2.68)	
AEOD4068	2	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	26.46 (2.46)	44 3/16" (1122)	48 1/8" (1222)	79 3/16" (2011)	25.73 (2.39)	28.90 (2.68)	
AEOD4068	1	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	12.65 (1.18)	21" (533)	23" (584)	79 3/16" (2011)	12.28 (1.14)	28.90 (2.68)	
AEOD5068	2	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	33.06 (3.07)	56 3/16" (1427)	60 1/8" (1527)	79 3/16" (2011)	32.38 (3.01)	35.73 (3.32)	
AEOD5068	1	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	15.95 (1.48)	27" (686)	29" (737)	79 3/16" (2011)	15.60 (1.45)	35.73 (3.32)	
AEOD5468	2	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	35.26 (3.28)	60 3/16" (1529)	64 1/8" (1629)	79 3/16" (2011)	34.43 (3.20)	38.01 (3.53)	
AEOD5468	1	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	17.05 (1.58)	29" (737)	31" (787)	79 3/16" (2011)	16.63 (1.54)	38.01 (3.53)	
AEOD6068	2	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	39.66 (3.68)	68 3/16" (1732)	72 1/8" (1832)	79 3/16" (2011)	38.48 (3.57)	42.57 (3.95)	
AEOD6068	1	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	19.25 (1.79)	33" (838)	35" (889)	79 3/16" (2011)	18.65 (1.73)	42.57 (3.95)	
AEOD7068	2	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	46.26 (4.30)	80 3/16" (2037)	84 1/8" (2137)	79 3/16" (2011)	44.37 (4.12)	49.40 (4.59)	
AEOD7068	1	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	22.55 (2.09)	39" (991)	41" (1041)	79 3/16" (2011)	21.60 (2.01)	49.40 (4.59)	
AEOD4080	2	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	30.81 (2.86)	44 3/16" (1122)	48 1/8" (1222)	92 3/16" (2342)	30.08 (2.79)	33.48 (3.11)	
AEOD4080	1	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	14.72 (1.37)	21" (533)	23" (584)	92 3/16" (2342)	14.36 (1.33)	33.48 (3.11)	
AEOD5080	2	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	38.49 (3.58)	56 3/16" (1427)	60 1/8" (1527)	92 3/16" (2342)	37.80 (3.51)	41.40 (3.85)	
AEOD5080	1	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	18.57 (1.73)	27" (686)	29" (737)	92 3/16" (2342)	18.22 (1.69)	41.40 (3.85)	
AEOD5480	2	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	41.05 (3.81)	60 3/16" (1529)	64 1/8" (1629)	92 3/16" (2342)	40.22 (3.74)	44.04 (4.09)	
AEOD5480	1	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	19.85 (1.84)	29" (737)	31" (787)	92 3/16" (2342)	19.43 (1.81)	44.04 (4.09)	
AEOD6080	2	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	46.17 (4.29)	68 3/16" (1732)	72 1/8" (1832)	92 3/16" (2342)	44.99 (4.18)	49.31 (4.58)	
AEOD6080	1	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	22.41 (2.08)	33" (838)	35" (889)	92 3/16" (2342)	21.81 (2.03)	49.31 (4.58)	
AEOD7080	2	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	53.86 (5.00)	80 3/16" (2037)	84 1/8" (2137)	92 3/16" (2342)	51.96 (4.83)	57.23 (5.32)	
AEOD7080	1	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	26.25 (2.44)	39 (991)	41" (1041)	92 3/16" (2342)	25.30 (2.35)	57.23 (5.32)	


- "Door Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.
- For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

Direct-Set Rectangular Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m ²)	Overall Sidelight Area Sq. Ft./ (m ²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
AESLD0868	9 15/16" (252)	82" (2083)	10 1/16" (265)	82 1/2" (2096)	3.77 (0.35)	5.66 (0.53)
AESLD1068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	7.03 (0.65)	9.08 (0.84)
AESLD2068	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.32 (1.14)	14.63 (1.36)
AESLD3068	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.84 (1.75)	21.46 (1.99)
AESLD0880	9 15/16" (252)	95" (2413)	10 1/16" (265)	95 1/2" (2426)	4.40 (0.41)	6.56 (0.61)
AESLD1080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	8.19 (0.76)	10.51 (0.98)
AESLD2080	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.37 (1.33)	16.95 (1.57)
AESLD3080	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	21.97 (2.04)	24.86 (2.31)

- Sidelight Dimension always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.

Direct-Set & Sash-Set Rectangular Entry Door Sidelights

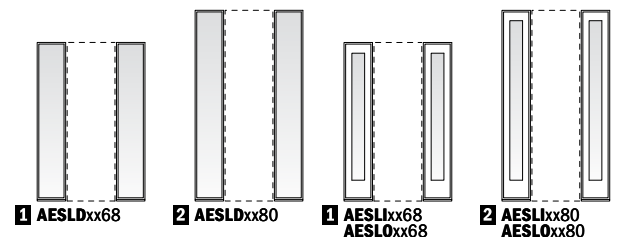


Direct-set (**AESLD**), sash-set inswing (**AESLI**) and sash-set outswing (**AESLO**) entry door sidelights shown. Dimensions and specifications shown for direct-set sidelights, contact your Andersen supplier for sash-set sidelight dimensions and specifications.


RESIDENTIAL ENTRY DOORS

Arch Entry Door Order Designation Description

Viewed from the exterior.

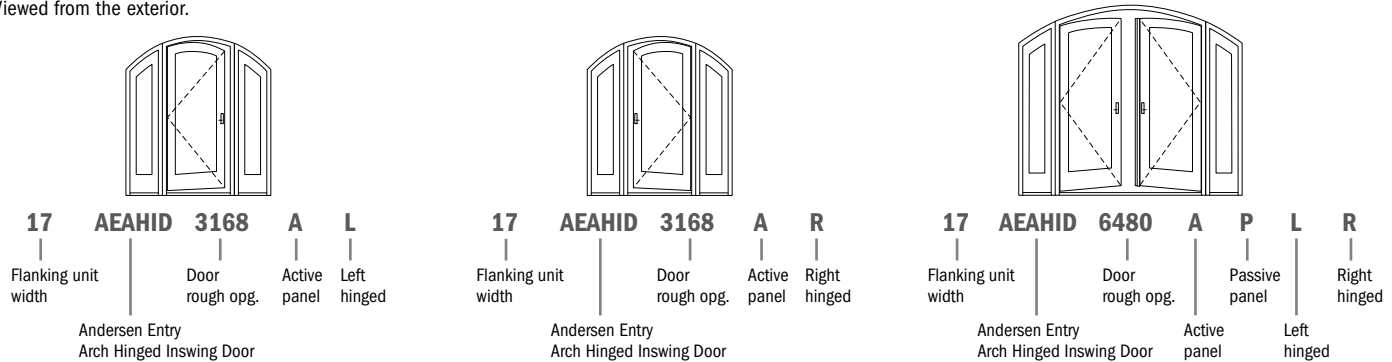

Arch inswing entry doors (AEAHD) shown above, for outswing arch entry doors use AEAOD. Outswing entry doors open outward to the exterior.

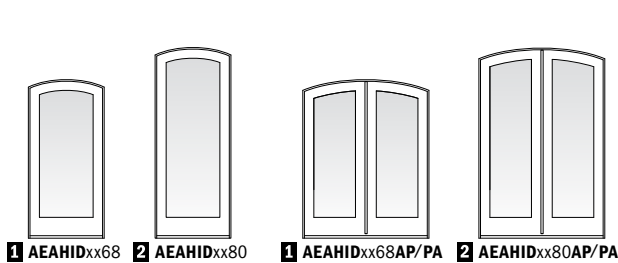


Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. AEAHD2068S or AEAHD4068SS).

Arch Inswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./ (m ²)	Clear Opening Maximums			Vent Area Sq. Ft./ (m ²)	Overall Door Area Sq. Ft./ (m ²)
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AEAHD2068	1	37 1/16" (941)	79 11/16" (2024)	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.26 (1.14)	20 13/16" (529)	22 7/8" (581)	77 3/16" (1961)	12.46 (1.16)	14.49 (1.35)
AEAHD2668	1	48" (1219)	79 5/16" (2015)	31 11/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	15.39 (1.43)	26 13/16" (681)	28 7/8" (733)	76 3/4" (1949)	15.70 (1.46)	17.85 (1.66)
AEAHD2868	1	48" (1219)	78 15/16" (2005)	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	16.39 (1.52)	28 13/16" (732)	30 7/8" (784)	76 7/16" (1942)	16.77 (1.56)	18.95 (1.76)
AEAHD3068	1	48" (1219)	78 1/8" (1984)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.33 (1.70)	32 13/16" (833)	34 7/8" (886)	75 11/16" (1922)	18.88 (1.75)	21.13 (1.96)
AEAHD3668	1	48" (1219)	76 3/4" (1949)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	21.11 (1.96)	38 13/16" (986)	40 7/8" (1038)	74 3/8" (1889)	22.01 (2.04)	24.36 (2.26)
AEAHD2080	1	37 1/16" (941)	92 11/16" (2354)	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.33 (1.33)	20 13/16" (529)	22 7/8" (581)	90 3/16" (2291)	14.53 (1.35)	16.81 (1.56)
AEAHD2680	1	48" (1219)	92 5/16" (2345)	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	18.00 (1.67)	26 13/16" (681)	28 7/8" (733)	89 3/4" (2280)	18.31 (1.70)	20.71 (1.92)
AEAHD2880	1	48" (1219)	91 15/16" (2335)	33 11/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	19.18 (1.78)	28 13/16" (732)	30 7/8" (784)	89 7/16" (2272)	19.55 (1.82)	21.99 (2.04)
AEAHD3080	1	48" (1219)	91 1/8" (2315)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	21.48 (2.00)	32 13/16" (833)	34 7/8" (886)	88 11/16" (2253)	22.03 (2.05)	24.53 (2.28)
AEAHD3680	1	48" (1219)	89 3/4" (2280)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	24.80 (2.30)	38 13/16" (986)	40 7/8" (1038)	87 3/8" (2219)	25.70 (2.39)	28.30 (2.63)
AEAHD4068	2	48" (1219)	74 3/4" (1899)	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	24.11 (2.24)	43 13/16" (1113)	47 15/16" (1218)	72 7/16" (1840)	25.61 (2.38)	28.07 (2.61)
AEAHD4068	1	48" (1219)	74 3/4" (1899)	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	11.54 (1.07)	20 7/8" (530)	22 15/16" (583)	72 7/16" (1840)	12.22 (1.14)	28.07 (2.61)
AEAHD5068	2	96" (2438)	76 3/4" (1949)	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	30.88 (2.87)	55 13/16" (1418)	59 15/16" (1522)	74 3/16" (1884)	32.24 (3.00)	34.97 (3.25)
AEAHD5068	1	96" (2438)	76 3/4" (1949)	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	14.91 (1.39)	26 7/8" (683)	28 15/16" (735)	74 3/16" (1884)	15.54 (1.44)	34.97 (3.25)
AEAHD5468	2	96" (2438)	76" (1930)	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	32.63 (3.03)	59 13/16" (1519)	63 15/16" (1624)	73 1/2" (1867)	34.29 (3.19)	37.09 (3.45)
AEAHD5468	1	96" (2438)	76" (1930)	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	15.79 (1.47)	28 7/8" (733)	30 15/16" (786)	73 1/2" (1867)	16.56 (1.54)	37.09 (3.45)
AEAHD6068	2	96" (2438)	74 7/16" (1891)	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	35.94 (3.34)	67 13/16" (1722)	71 15/16" (1827)	71 15/16" (1827)	38.33 (3.56)	41.27 (3.83)
AEAHD6068	1	96" (2438)	74 7/16" (1891)	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	17.45 (1.62)	32 7/8" (835)	34 15/16" (887)	71 15/16" (1827)	18.58 (1.73)	41.27 (3.83)
AEAHD7068	2	96" (2438)	71 5/8" (1819)	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	40.37 (3.75)	79 13/16" (2027)	83 15/16" (2132)	69 1/4" (1759)	44.22 (4.11)	47.36 (4.40)
AEAHD7068	1	96" (2438)	71 5/8" (1819)	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	19.69 (1.83)	38 7/8" (987)	40 15/16" (1040)	69 1/4" (1759)	21.53 (2.00)	47.36 (4.40)
AEAHD4080	2	48" (1219)	87 3/4" (2229)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	28.44 (2.64)	43 13/16" (1113)	47 15/16" (1218)	85 7/16" (2170)	29.94 (2.78)	32.65 (3.03)
AEAHD4080	1	48" (1219)	87 3/4" (2229)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	13.61 (1.26)	20 7/8" (530)	22 15/16" (583)	85 7/16" (2170)	14.29 (1.33)	32.65 (3.03)
AEAHD5080	2	96" (2438)	89 3/4" (2280)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	36.29 (3.37)	55 13/16" (1418)	59 15/16" (1522)	87 3/16" (2215)	37.65 (3.50)	40.64 (3.78)
AEAHD5080	1	96" (2438)	89 3/4" (2280)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	17.52 (1.63)	26 7/8" (683)	28 15/16" (735)	87 3/16" (2215)	18.15 (1.69)	40.64 (3.78)
AEAHD5480	2	96" (2438)	89" (2261)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	38.41 (3.57)	59 13/16" (1519)	63 15/16" (1624)	86 1/2" (2197)	40.07 (3.72)	43.12 (4.01)
AEAHD5480	1	96" (2438)	89" (2261)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	18.58 (1.73)	28 7/8" (733)	30 15/16" (786)	86 1/2" (2197)	19.35 (1.80)	43.12 (4.01)
AEAHD6080	2	96" (2438)	87 7/16" (2221)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	42.43 (3.94)	67 13/16" (1722)	71 15/16" (1827)	84 15/16" (2157)	44.83 (4.16)	48.02 (4.46)
AEAHD6080	1	96" (2438)	87 7/16" (2221)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	20.61 (1.91)	32 7/8" (835)	34 15/16" (887)	84 15/16" (2157)	21.74 (2.02)	48.02 (4.46)
AEAHD7080	2	96" (2438)	84 5/8" (2149)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	47.94 (4.45)	79 13/16" (2027)	83 15/16" (2132)	82 1/4" (2089)	51.80 (4.81)	55.20 (5.13)
AEAHD7080	1	96" (2438)	84 5/8" (2149)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	23.38 (2.17)	38 7/8" (987)	40 15/16" (1040)	82 1/4" (2089)	25.22 (2.34)	55.20 (5.13)

- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.
- *For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

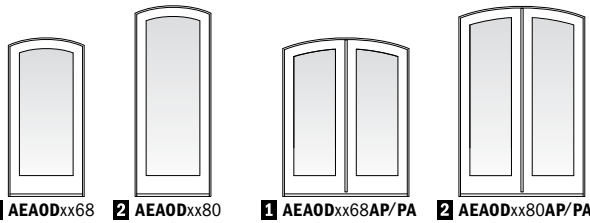

Custom-size doors are available in 1/8" (3) increments.


Available in custom designed panels. Stationary doors are also available (i.e. **AEAOD2068S** or **AEAOD4068SS**).

Arch Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./(m ²)	Clear Opening Maximums			Vent Area Sq. Ft./(m ²)	Overall Door Area Sq. Ft./(m ²)
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AEAOD2068	1	37 1/16" (941)	79 1/16" (2024)	25 1/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.37 (1.15)	21 1/8" (537)	23 1/16" (586)	77 1/4" (1962)	12.58 (1.17)	14.49 (1.35)
AEAOD2668	1	48" (1219)	79 1/16" (2015)	31 1/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	15.50 (1.44)	27 1/8" (689)	29 1/16" (738)	76 13/16" (1951)	15.82 (1.47)	17.85 (1.66)
AEAOD2868	1	48" (1219)	78 15/16" (2005)	33 1/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	16.50 (1.53)	29 1/8" (740)	31 1/16" (789)	76 1/2" (1943)	16.89 (1.57)	18.95 (1.76)
AEAOD3068	1	48" (1219)	78 1/8" (1984)	37 1/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.44 (1.71)	33 1/8" (841)	35 1/16" (891)	75 3/4" (1924)	19.00 (1.77)	21.13 (1.96)
AEAOD3668	1	48" (1219)	76 3/4" (1949)	43 1/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	21.21 (1.97)	39 1/8" (994)	41 1/16" (1043)	74 3/8" (1889)	22.13 (2.06)	24.36 (2.26)
AEAOD2080	1	37 1/16" (941)	92 1/16" (2354)	25 1/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	12.37 (1.15)	21 1/8" (537)	23 1/16" (586)	77 1/4" (1962)	14.66 (1.36)	16.81 (1.56)
AEAOD2680	1	48" (1219)	92 5/16" (2345)	31 1/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	15.50 (1.44)	27 1/8" (689)	29 1/16" (738)	76 13/16" (1951)	18.45 (1.71)	20.71 (1.92)
AEAOD2880	1	48" (1219)	91 15/16" (2335)	33 1/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	16.50 (1.53)	29 1/8" (740)	31 1/16" (789)	76 1/2" (1943)	19.69 (1.83)	21.99 (2.04)
AEAOD3080	1	48" (1219)	91 1/4" (2315)	37 1/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.44 (1.71)	33 1/8" (841)	35 1/16" (891)	75 3/4" (1924)	22.17 (2.06)	24.53 (2.28)
AEAOD3680	1	48" (1219)	89 3/4" (2280)	43 1/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	21.21 (1.97)	39 1/8" (994)	41 1/16" (1043)	74 3/8" (1889)	25.84 (2.40)	28.30 (2.63)
AEAOD4068	2	48" (1219)	74 3/4" (1899)	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	24.23 (2.25)	44 3/16" (1122)	48 1/8" (1222)	72 1/2" (1842)	25.73 (2.39)	28.07 (2.61)
AEAOD4068	1	48" (1219)	74 3/4" (1899)	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	11.58 (1.08)	21" (533)	23" (584)	72 1/2" (1842)	12.28 (1.14)	28.07 (2.61)
AEAOD5068	2	96" (2438)	76 3/4" (1949)	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	31.00 (2.88)	56 3/16" (1427)	60 1/8" (1527)	74 1/4" (1886)	32.38 (3.01)	34.97 (3.25)
AEAOD5068	1	96" (2438)	76 3/4" (1949)	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	14.95 (1.39)	27" (686)	29" (737)	74 1/4" (1886)	15.60 (1.45)	34.97 (3.25)
AEAOD5468	2	96" (2438)	76" (1930)	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	32.76 (3.04)	60 3/16" (1529)	64 1/8" (1629)	73 9/16" (1868)	34.43 (3.20)	37.09 (3.45)
AEAOD5468	1	96" (2438)	76" (1930)	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	15.84 (1.47)	29" (737)	31" (787)	73 9/16" (1868)	16.63 (1.54)	37.09 (3.45)
AEAOD6068	2	96" (2438)	74 7/16" (1891)	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	36.06 (3.35)	68 3/16" (1732)	72 1/8" (1832)	72" (1829)	38.48 (3.57)	41.27 (3.83)
AEAOD6068	1	96" (2438)	74 7/16" (1891)	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	17.50 (1.63)	33" (838)	35" (889)	72" (1829)	18.65 (1.73)	41.27 (3.83)
AEAOD7068	2	96" (2438)	71 5/8" (1819)	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	40.49 (3.76)	80 3/16" (2037)	84 1/8" (2137)	69 5/16" (1761)	44.37 (4.12)	47.36 (4.40)
AEAOD7068	1	96" (2438)	71 5/8" (1819)	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	19.73 (1.83)	39" (991)	41" (1041)	69 5/16" (1761)	21.60 (2.01)	47.36 (4.40)
AEAOD4080	2	48" (1219)	87 3/4" (2229)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	28.57 (2.65)	44 3/16" (1122)	48 1/8" (1222)	85 1/2" (2172)	30.08 (2.79)	32.65 (3.03)
AEAOD4080	1	48" (1219)	87 3/4" (2229)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	13.66 (1.27)	21" (533)	23" (584)	85 1/2" (2172)	14.36 (1.33)	32.65 (3.03)
AEAOD5080	2	96" (2438)	89 3/4" (2280)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	36.43 (3.38)	56 3/16" (1427)	60 1/8" (1527)	87 1/4" (2216)	37.80 (3.51)	40.64 (3.78)
AEAOD5080	1	96" (2438)	89 3/4" (2280)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	17.57 (1.63)	27" (686)	29" (737)	87 1/4" (2216)	18.22 (1.69)	40.64 (3.78)
AEAOD5480	2	96" (2438)	89" (2261)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	38.55 (3.58)	60 3/16" (1529)	64 1/8" (1629)	86 9/16" (2199)	40.22 (3.74)	43.12 (4.01)
AEAOD5480	1	96" (2438)	89" (2261)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	18.63 (1.73)	29" (737)	31" (787)	86 9/16" (2199)	19.43 (1.81)	43.12 (4.01)
AEAOD6080	2	96" (2438)	87 7/16" (2221)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	42.57 (3.95)	68 3/16" (1732)	72 1/8" (1832)	85" (2159)	44.99 (4.18)	48.02 (4.46)
AEAOD6080	1	96" (2438)	87 7/16" (2221)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	20.66 (1.92)	33" (838)	35" (889)	85" (2159)	21.81 (2.03)	48.02 (4.46)
AEAOD7080	2	96" (2438)	84 5/8" (2149)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	48.09 (4.47)	80 3/16" (2037)	84 1/8" (2137)	82 5/16" (2091)	51.96 (4.83)	55.20 (5.13)
AEAOD7080	1	96" (2438)	84 5/8" (2149)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	23.44 (2.18)	39" (991)	41" (1041)	82 5/16" (2091)	25.30 (2.35)	55.20 (5.13)


- * "Door Dimension" always refers to outside frame to frame dimension.
- * "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- * Dimensions in parentheses are in millimeters or square meters.
- * For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

Direct-Set and Sash-Set Arch Entry Door Sidelights

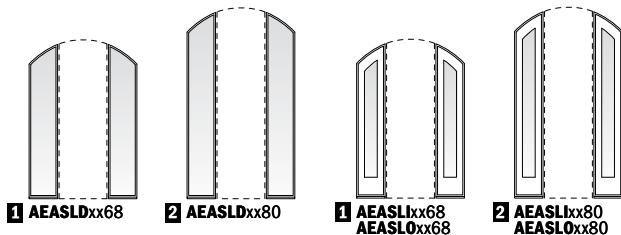

Direct-set (**AEASLD**), sash-set inswing (**AEASLI**) and sash-set outswing (**AEASLO**) entry door sidelights shown. Contact your Andersen supplier for dimensions and specifications.

RESIDENTIAL ENTRY DOORS

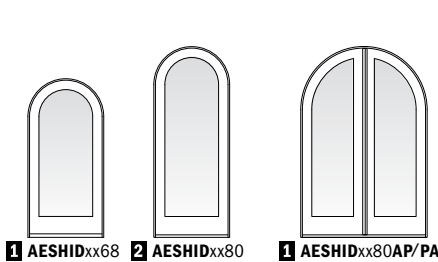


Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels.. Stationary doors are also available (i.e. **AESHD3080S** or **AESHD4080SS**).

Springline™ Inswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./ (m ²)	Clear Opening Maximums			Vent Area Sq. Ft./ (m ²)	Overall Door Area Sq. Ft./ (m ²)
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AESHD3068	1	18 7/8" (479)	63 1/8" (1603)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	14.92 (1.39)	32 13/16" (833)	34 1/8" (886)	61 5/8" (1565)	18.25 (1.70)	20.41 (1.90)
AESHD3668	1	21 7/8" (556)	60 1/8" (1527)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	16.64 (1.55)	38 13/16" (986)	40 7/8" (1038)	58 5/8" (1489)	21.21 (1.97)	23.46 (2.18)
AESHD3080	1	18 7/8" (479)	76 1/8" (1934)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.07 (1.68)	32 13/16" (833)	34 1/8" (886)	74 5/8" (1895)	21.40 (1.99)	23.81 (2.21)
AESHD3680	1	21 7/8" (556)	73 1/8" (1857)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	20.33 (1.89)	38 13/16" (986)	40 7/8" (1038)	71 5/8" (1819)	24.90 (2.31)	27.40 (2.55)
AESHD4080	2	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	22.68 (2.11)	43 13/16" (1113)	47 15/16" (1218)	68 1/8" (1730)	28.95 (2.69)	31.56 (2.93)
AESHD4080	1	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	10.85 (1.01)	20 7/8" (530)	22 15/16" (583)	68 1/8" (1730)	13.79 (1.28)	31.56 (2.93)
AESHD5080	2	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	25.86 (2.40)	55 13/16" (1418)	59 15/16" (1522)	62 1/8" (1578)	35.66 (3.31)	38.46 (3.57)
AESHD5080	1	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	12.48 (1.16)	26 1/8" (683)	28 15/16" (735)	62 1/8" (1578)	17.14 (1.59)	38.46 (3.57)
AESHD5480	2	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	26.70 (2.48)	59 13/16" (1519)	63 15/16" (1624)	60 1/8" (1527)	37.85 (3.52)	40.72 (3.78)
AESHD5480	1	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	12.92 (1.20)	28 7/8" (733)	30 15/16" (786)	60 1/8" (1527)	18.24 (1.69)	40.72 (3.78)
AESHD6080	2	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	28.04 (2.60)	67 13/16" (1722)	71 15/16" (1827)	56 1/8" (1426)	42.15 (3.92)	45.15 (4.19)
AESHD6080	1	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	13.62 (1.27)	32 7/8" (835)	34 15/16" (887)	56 1/8" (1426)	20.39 (1.89)	45.15 (4.19)
AESHD7080	2	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	29.22 (2.71)	79 13/16" (2027)	83 15/16" (2132)	50 1/8" (1273)	48.43 (4.50)	51.62 (4.80)
AESHD7080	1	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	14.25 (1.32)	38 7/8" (987)	40 15/16" (1040)	50 1/8" (1273)	23.53 (2.19)	51.62 (4.80)

- "Door Dimension" always refers to outside frame to frame dimension.
 - **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
 - Dimensions in parentheses are in millimeters or square meters.
- *For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

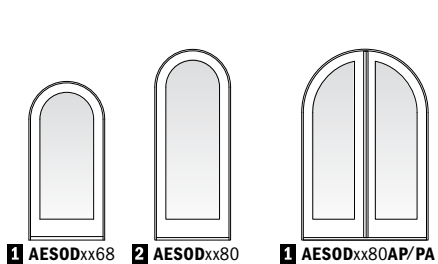

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels.. Stationary doors are also available (i.e. **AESOD3080S** or **AESOD4080SS**).

Springline™ Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./ (m ²)	Clear Opening Maximums			Vent Area Sq. Ft./ (m ²)	Overall Door Area Sq. Ft./ (m ²)
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AESOD3068	1	18 7/8" (479)	63 1/8" (1603)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	15.01 (1.39)	33 1/8" (841)	35 1/16" (891)	61 5/8" (1565)	18.34 (1.70)	20.41 (1.90)
AESOD3668	1	21 7/8" (556)	60 1/8" (1527)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	16.72 (1.55)	39 1/8" (994)	41 1/16" (1043)	58 5/8" (1489)	21.29 (1.98)	23.46 (2.18)
AESOD3080	1	18 7/8" (479)	76 1/8" (1934)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.17 (1.69)	33 1/8" (841)	35 1/16" (891)	74 5/8" (1895)	21.50 (2.00)	23.81 (2.21)
AESOD3680	1	21 7/8" (556)	73 1/8" (1857)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	20.42 (1.90)	39 1/8" (994)	41 1/16" (1043)	71 5/8" (1819)	25.00 (2.32)	27.40 (2.55)
AESOD4080	2	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	22.77 (2.12)	44 3/16" (1122)	48 1/16" (1222)	68 1/8" (1730)	29.04 (2.70)	31.56 (2.93)
AESOD4080	1	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	10.88 (1.01)	21" (533)	23" (584)	68 1/8" (1730)	13.79 (1.28)	31.56 (2.93)
AESOD5080	2	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	25.94 (2.41)	56 3/16" (1427)	60 1/8" (1527)	62 1/8" (1578)	35.74 (3.32)	38.46 (3.57)
AESOD5080	1	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	12.51 (1.16)	27" (686)	29" (737)	62 1/8" (1578)	17.14 (1.59)	38.46 (3.57)
AESOD5480	2	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	26.77 (2.49)	60 3/16" (1529)	64 1/8" (1629)	60 1/8" (1527)	37.92 (3.52)	40.72 (3.78)
AESOD5480	1	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	12.94 (1.20)	29" (737)	31" (787)	60 1/8" (1527)	18.24 (1.69)	40.72 (3.78)
AESOD6080	2	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	28.11 (2.61)	68 3/16" (1732)	72 1/8" (1832)	56 1/8" (1426)	42.23 (3.92)	45.15 (4.19)
AESOD6080	1	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	13.64 (1.27)	33" (838)	35" (889)	56 1/8" (1426)	20.39 (1.89)	45.15 (4.19)
AESOD7080	2	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	29.28 (2.72)	80 3/16" (2037)	84 1/8" (2137)	50 1/8" (1273)	48.50 (4.51)	51.62 (4.80)
AESOD7080	1	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	14.27 (1.33)	39" (991)	41" (1041)	50 1/8" (1273)	23.53 (2.19)	51.62 (4.80)

- "Door Dimension" always refers to outside frame to frame dimension.
 - **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
 - Dimensions in parentheses are in millimeters or square meters.
- *For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

Table of Commercial Outswing Entry Door and Sidelight Sizes

Scale $\frac{1}{8}" = 1'-0"$ (1:96)

Door Dimension	1'-3 $\frac{7}{8}"$ (403)	2'-1 $\frac{5}{8}"$ (651)	2'-7 $\frac{5}{8}"$ (803)	2'-9 $\frac{5}{8}"$ (854)	3'-1 $\frac{5}{8}"$ (956)	3'-9 $\frac{7}{8}"$ (1165)	6'-2 $\frac{3}{4}"$ (1899)
6'-10" (2083)							
7'-1 $\frac{5}{16}"$ (2167)							
7'-11" (2413)							



Custom-size doors are available in $\frac{1}{8}"$ (3) increments.


Standard sizes shown. See page 8 for minimum rough opening dimensions, glass area dimensions and opening specifications.

Available in both 10" (254) and 12" (305) bottom rail heights. For additional stile widths and additional options contact your Andersen supplier. This door has a limited water rating (LW) due to the low-threshold sill. Handle and lock are located between 34" (864) and 48" (1219).

Check local building codes, including the Americans with Disabilities Act (ADA) accessibility.

For entry door transoms see pages 10-11.

COMMERCIAL ENTRY DOORS

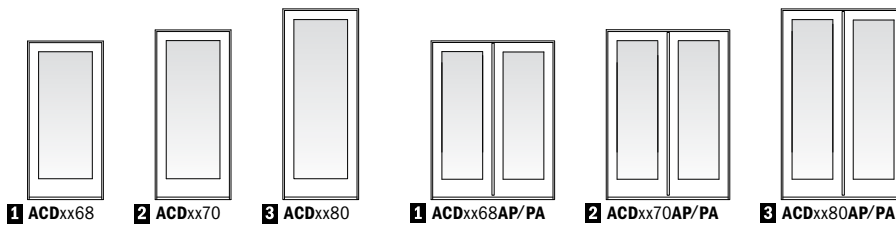

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. 3068S or 4068SS).

Commercial Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions		Min. Rough Opening		Clear Opening Area Sq. Ft./ (m ²)	Clear Opening Maximums			Glass Area Sq. Ft./ (m ²)	Vent Area Sq. Ft./ (m ²)	Overall Door Area Sq. Ft./ (m ²)
		Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)			
ACD3068	1	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	19.45 (1.81)	33 1/8" (841)	35 1/16" (891)	79 7/8" (2029)	10.60 (0.98)	19.45 (1.81)	21.46 (1.99)
ACD3668	1	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	22.78 (2.12)	39 1/8" (994)	41 1/16" (1043)	79 7/8" (2029)	13.15 (1.22)	22.78 (2.12)	24.88 (2.31)
ACD3868	1	45 15/16" (1167)	82" (2083)	46 7/16" (1180)	82 1/2" (2180)	24.02 (2.23)	41 3/8" (1051)	43 9/16" (1100)	79 7/8" (2029)	14.11 (1.31)	24.02 (2.23)	26.16 (2.43)
ACD3070	1	37 11/16" (957)	85 5/16" (2167)	38 3/16" (970)	85 13/16" (2180)	20.26 (1.88)	33 1/8" (841)	35 1/16" (891)	83 3/16" (2113)	11.17 (1.04)	20.26 (1.88)	22.33 (2.07)
ACD3670	1	43 11/16" (1110)	85 5/16" (2167)	44 3/16" (1122)	85 13/16" (2180)	23.72 (2.20)	39 1/8" (994)	41 1/16" (1043)	83 3/16" (2113)	13.86 (1.29)	23.72 (2.20)	25.88 (2.40)
ACD3870	1	45 15/16" (1167)	85 5/16" (2167)	46 7/16" (1180)	85 13/16" (2426)	25.02 (2.32)	41 3/8" (1051)	43 9/16" (1100)	83 3/16" (2113)	14.87 (1.38)	25.02 (2.32)	27.22 (2.53)
ACD3080	1	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	22.61 (2.10)	33 1/8" (841)	35 1/16" (891)	92 7/8" (2359)	12.84 (1.19)	22.61 (2.10)	24.86 (2.31)
ACD3680	1	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	26.48 (2.46)	39 1/8" (994)	41 1/16" (1043)	92 7/8" (2359)	15.94 (1.48)	26.48 (2.46)	28.82 (2.68)
ACD3880	1	45 15/16" (1167)	95" (2413)	46 7/16" (1180)	95 1/2" (2096)	27.94 (2.60)	41 3/8" (1051)	43 9/16" (1100)	92 7/8" (2359)	17.10 (1.59)	27.94 (2.60)	30.31 (2.82)
ACD4068	2	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	26.69 (2.48)	44 3/16" (1122)	48 1/8" (1222)	79 7/8" (2029)	12.46 (1.16)	26.69 (2.48)	28.90 (2.68)
ACD4068	1	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	12.76 (1.19)	21" (533)	23" (584)	79 7/8" (2029)	12.46 (1.16)	12.76 (1.19)	28.90 (2.68)
ACD5068	2	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	33.35 (3.10)	56 3/16" (1427)	60 1/8" (1527)	79 7/8" (2029)	16.08 (1.49)	33.35 (3.10)	35.73 (3.32)
ACD5068	1	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	16.09 (1.49)	27" (686)	29" (737)	79 7/8" (2029)	16.08 (1.49)	16.09 (1.49)	35.73 (3.32)
ACD5468	2	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	35.57 (3.30)	60 3/16" (1529)	64 1/8" (1629)	79 7/8" (2029)	17.79 (1.65)	35.57 (3.30)	38.01 (3.53)
ACD5468	1	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	17.20 (1.60)	29" (737)	31" (787)	79 7/8" (2029)	17.79 (1.65)	17.20 (1.60)	38.01 (3.53)
ACD6068	2	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	40.01 (3.72)	68 3/16" (1732)	72 1/8" (1832)	79 7/8" (2029)	21.20 (1.97)	40.01 (3.72)	42.57 (3.95)
ACD6068	1	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2180)	19.41 (1.80)	33" (838)	35" (889)	79 7/8" (2029)	21.20 (1.97)	19.41 (1.80)	42.57 (3.95)
ACD4070	2	50 3/4" (1289)	85 5/16" (2167)	51 1/4" (1302)	85 13/16" (2180)	27.80 (2.58)	44 3/16" (1122)	48 1/8" (1222)	83 3/16" (2113)	13.13 (1.22)	27.80 (2.58)	30.07 (2.79)
ACD4070	1	50 3/4" (1289)	85 5/16" (2167)	51 1/4" (1302)	85 13/16" (2180)	13.29 (1.23)	21" (533)	23" (584)	83 3/16" (2113)	13.13 (1.22)	13.29 (1.23)	30.07 (2.79)
ACD5070	2	62 3/4" (1594)	85 5/16" (2167)	63 1/4" (1607)	85 13/16" (2180)	34.73 (3.23)	56 3/16" (1427)	60 1/8" (1527)	83 3/16" (2113)	16.95 (1.57)	34.73 (3.23)	37.18 (3.45)
ACD5070	1	62 3/4" (1594)	85 5/16" (2167)	63 1/4" (1607)	85 13/16" (2180)	16.75 (1.56)	27" (686)	29" (737)	83 3/16" (2113)	16.95 (1.57)	16.75 (1.56)	37.18 (3.45)
ACD5470	2	66 3/4" (1695)	85 5/16" (2167)	67 1/4" (1708)	85 13/16" (2180)	37.04 (3.44)	60 3/16" (1529)	64 1/8" (1629)	83 3/16" (2113)	18.75 (1.74)	37.04 (3.44)	39.55 (3.67)
ACD5470	1	66 3/4" (1695)	85 5/16" (2167)	67 1/4" (1708)	85 13/16" (2180)	17.91 (1.66)	29" (737)	31" (787)	83 3/16" (2113)	18.75 (1.74)	17.91 (1.66)	39.55 (3.67)
ACD6070	2	74 3/4" (1899)	85 5/16" (2167)	75 1/4" (1911)	85 13/16" (2180)	41.67 (3.87)	68 3/16" (1732)	72 1/8" (1832)	83 3/16" (2113)	22.34 (2.08)	41.67 (3.87)	44.29 (4.11)
ACD6070	1	74 3/4" (1899)	85 5/16" (2167)	75 1/4" (1911)	85 13/16" (2426)	20.22 (1.88)	33" (838)	35" (889)	83 3/16" (2113)	22.34 (2.08)	20.22 (1.88)	44.29 (4.11)
ACD4080	2	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	31.04 (2.88)	44 3/16" (1122)	48 1/8" (1222)	92 7/8" (2359)	15.10 (1.40)	31.04 (2.88)	33.48 (3.11)
ACD4080	1	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	14.83 (1.38)	21" (533)	23" (584)	92 7/8" (2359)	15.10 (1.40)	14.83 (1.38)	33.48 (3.11)
ACD5080	2	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	38.78 (3.60)	56 3/16" (1427)	60 1/8" (1527)	92 7/8" (2359)	19.49 (1.81)	38.78 (3.60)	41.40 (3.85)
ACD5080	1	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	18.70 (1.74)	27" (686)	29" (737)	92 7/8" (2359)	19.49 (1.81)	18.70 (1.74)	41.40 (3.85)
ACD5480	2	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	41.36 (3.84)	60 3/16" (1529)	64 1/8" (1629)	92 7/8" (2359)	21.56 (2.00)	41.36 (3.84)	44.04 (4.09)
ACD5480	1	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	19.99 (1.86)	29" (737)	31" (787)	92 7/8" (2359)	21.56 (2.00)	19.99 (1.86)	44.04 (4.09)
ACD6080	2	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	46.52 (4.32)	68 3/16" (1732)	72 1/8" (1832)	92 7/8" (2359)	25.69 (2.39)	46.52 (4.32)	49.31 (4.58)
ACD6080	1	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	22.57 (2.10)	33" (838)	35" (889)	92 7/8" (2359)	25.69 (2.39)	22.57 (2.10)	49.31 (4.58)


- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.

*For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

Direct-Set Commercial Outswing Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m ²)	Overall Sidelight Area Sq. Ft./ (m ²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
ACSLD0868	9 ¹⁵ / ₁₆ " (252)	82" (2083)	10 ⁷ / ₁₆ " (265)	82 ¹ / ₂ " (2096)	3.77 (0.35)	5.66 (0.53)
ACSLD1068	15 ¹⁵ / ₁₆ " (405)	82" (2083)	16 ⁷ / ₁₆ " (418)	82 ¹ / ₂ " (2096)	7.03 (0.65)	9.08 (0.84)
ACSLD2068	25 ¹¹ / ₁₆ " (652)	82" (2083)	26 ³ / ₁₆ " (665)	82 ¹ / ₂ " (2096)	12.32 (1.14)	14.63 (1.36)
ACSLD3068	37 ¹¹ / ₁₆ " (957)	82" (2083)	38 ³ / ₁₆ " (970)	82 ¹ / ₂ " (2096)	18.84 (1.75)	21.46 (1.99)
ACSLD0870	9 ¹⁵ / ₁₆ " (252)	85 ⁵ / ₁₆ " (2167)	10 ⁷ / ₁₆ " (265)	85 ¹³ / ₁₆ " (2180)	3.93 (0.37)	5.89 (0.55)
ACSLD1070	15 ¹⁵ / ₁₆ " (405)	85 ⁵ / ₁₆ " (2167)	16 ⁷ / ₁₆ " (418)	85 ¹³ / ₁₆ " (2180)	7.32 (0.68)	9.44 (0.88)
ACSLD2070	25 ¹¹ / ₁₆ " (652)	85 ⁵ / ₁₆ " (2167)	26 ³ / ₁₆ " (665)	85 ¹³ / ₁₆ " (2180)	12.84 (1.19)	15.22 (1.41)
ACSLD3070	37 ¹¹ / ₁₆ " (957)	85 ⁵ / ₁₆ " (2167)	38 ³ / ₁₆ " (970)	85 ¹³ / ₁₆ " (2180)	19.63 (1.82)	22.33 (2.07)
ACSLD0880	9 ¹⁵ / ₁₆ " (252)	95" (2413)	10 ⁷ / ₁₆ " (265)	95 ¹ / ₂ " (2426)	4.40 (0.41)	6.56 (0.61)
ACSLD1080	15 ¹⁵ / ₁₆ " (405)	95" (2413)	16 ⁷ / ₁₆ " (418)	95 ¹ / ₂ " (2426)	8.19 (0.76)	10.51 (0.98)
ACSLD2080	25 ¹¹ / ₁₆ " (652)	95" (2413)	26 ³ / ₁₆ " (665)	95 ¹ / ₂ " (2426)	14.37 (1.33)	16.95 (1.57)
ACSLD3080	37 ¹¹ / ₁₆ " (957)	95" (2413)	38 ³ / ₁₆ " (970)	95 ¹ / ₂ " (2426)	21.97 (2.04)	24.86 (2.31)

- "Sidelight Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.

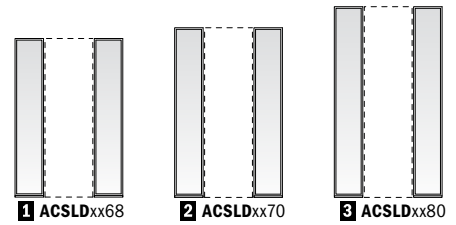


Direct-set (**ACSLD**) commercial outswing entry door sidelights.

Sash-Set Commercial Outswing Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m ²)	Overall Sidelight Area Sq. Ft./ (m ²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
ACSL01068	15 ¹⁵ / ₁₆ " (405)	82" (2083)	16 ⁷ / ₁₆ " (418)	82 ¹ / ₂ " (2096)	3.41 (0.32)	9.08 (0.84)
ACSL02068	25 ¹¹ / ₁₆ " (652)	82" (2083)	26 ³ / ₁₆ " (665)	82 ¹ / ₂ " (2096)	7.56 (0.70)	14.63 (1.36)
ACSL02668	31 ¹¹ / ₁₆ " (805)	82" (2083)	32 ³ / ₁₆ " (818)	82 ¹ / ₂ " (2096)	8.79 (0.82)	18.04 (1.68)
ACSL02868	33 ¹¹ / ₁₆ " (856)	82" (2083)	34 ³ / ₁₆ " (868)	82 ¹ / ₂ " (2096)	9.21 (0.86)	19.18 (1.78)
ACSL01070	15 ¹⁵ / ₁₆ " (405)	85 ⁵ / ₁₆ " (2167)	16 ⁷ / ₁₆ " (418)	85 ¹³ / ₁₆ " (2180)	3.59 (0.33)	9.44 (0.88)
ACSL02070	25 ¹¹ / ₁₆ " (652)	85 ⁵ / ₁₆ " (2167)	26 ³ / ₁₆ " (665)	85 ¹³ / ₁₆ " (2180)	7.97 (0.74)	15.22 (1.41)
ACSL02670	31 ¹¹ / ₁₆ " (805)	85 ⁵ / ₁₆ " (2167)	32 ³ / ₁₆ " (818)	85 ¹³ / ₁₆ " (2180)	9.26 (0.86)	18.77 (1.74)
ACSL02870	33 ¹¹ / ₁₆ " (856)	85 ⁵ / ₁₆ " (2167)	34 ³ / ₁₆ " (868)	85 ¹³ / ₁₆ " (2180)	9.71 (0.90)	19.96 (1.85)
ACSL01080	15 ¹⁵ / ₁₆ " (405)	95" (2413)	16 ⁷ / ₁₆ " (418)	95 ¹ / ₂ " (2426)	4.13 (0.38)	10.51 (0.98)
ACSL02080	25 ¹¹ / ₁₆ " (652)	95" (2413)	26 ³ / ₁₆ " (665)	95 ¹ / ₂ " (2426)	9.16 (0.85)	16.95 (1.57)
ACSL02680	31 ¹¹ / ₁₆ " (805)	95" (2413)	32 ³ / ₁₆ " (818)	95 ¹ / ₂ " (2426)	10.65 (0.99)	20.9 (1.94)
ACSL02880	33 ¹¹ / ₁₆ " (856)	95" (2413)	34 ³ / ₁₆ " (868)	95 ¹ / ₂ " (2426)	11.17 (1.04)	22.22 (2.06)

- "Sidelight Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.

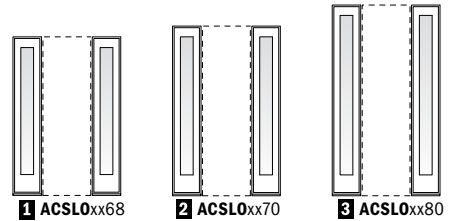

Sash-set (**ACSL0**) commercial outswing entry door sidelights.

RESIDENTIAL & COMMERCIAL ENTRY DOOR TRANSOMS

Direct-Set Rectangular Entry Door Transom Dimensions and Specifications

Transom Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m ²)	Overall Sidelight Area Sq. Ft./ (m ²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
AETD0812	9 ¹⁵ / ₁₆ " (252)	12 ¹³ / ₁₆ " (325)	10 ⁷ / ₁₆ " (265)	13 ⁵ / ₁₆ " (338)	0.47 (0.04)	0.88 (0.08)
AETD1012	15 ¹⁵ / ₁₆ " (405)	12 ¹³ / ₁₆ " (325)	16 ⁷ / ₁₆ " (418)	13 ⁵ / ₁₆ " (338)	0.88 (0.08)	1.42 (0.13)
AETD2012	25 ¹¹ / ₁₆ " (652)	12 ¹³ / ₁₆ " (325)	26 ³ / ₁₆ " (665)	13 ⁵ / ₁₆ " (338)	1.55 (0.14)	2.29 (0.21)
AETD2612	31 ¹¹ / ₁₆ " (805)	12 ¹³ / ₁₆ " (325)	32 ³ / ₁₆ " (818)	13 ⁵ / ₁₆ " (338)	1.95 (0.18)	2.82 (0.26)
AETD2812	33 ¹¹ / ₁₆ " (856)	12 ¹³ / ₁₆ " (325)	34 ³ / ₁₆ " (868)	13 ⁵ / ₁₆ " (338)	2.09 (0.19)	3.00 (0.28)
AETD3012	37 ¹¹ / ₁₆ " (957)	12 ¹³ / ₁₆ " (325)	38 ³ / ₁₆ " (970)	13 ⁵ / ₁₆ " (338)	2.36 (0.22)	3.35 (0.31)
AETD3612	43 ¹¹ / ₁₆ " (1110)	12 ¹³ / ₁₆ " (325)	44 ³ / ₁₆ " (1122)	13 ⁵ / ₁₆ " (338)	2.77 (0.26)	3.89 (0.36)
AETD4012	50 ³ / ₄ " (1289)	12 ¹³ / ₁₆ " (325)	51 ¹ / ₄ " (1302)	13 ⁵ / ₁₆ " (338)	3.25 (0.30)	4.52 (0.42)
AETD5012	62 ³ / ₄ " (1594)	12 ¹³ / ₁₆ " (325)	63 ¹ / ₄ " (1607)	13 ⁵ / ₁₆ " (338)	4.07 (0.38)	5.58 (0.52)
AETD5412	66 ³ / ₄ " (1695)	12 ¹³ / ₁₆ " (325)	67 ¹ / ₄ " (1708)	13 ⁵ / ₁₆ " (338)	4.34 (0.40)	5.94 (0.55)
AETD6012	74 ³ / ₄ " (1899)	12 ¹³ / ₁₆ " (325)	75 ¹ / ₄ " (1911)	13 ⁵ / ₁₆ " (338)	4.89 (0.45)	6.65 (0.62)
AETD7012	86 ³ / ₄ " (2203)	12 ¹³ / ₁₆ " (325)	87 ¹ / ₄ " (2216)	13 ⁵ / ₁₆ " (338)	5.71 (0.53)	7.72 (0.72)
AETD0817	9 ¹⁵ / ₁₆ " (252)	17 ¹³ / ₁₆ " (452)	10 ⁷ / ₁₆ " (265)	18 ⁵ / ₁₆ " (465)	0.71 (0.07)	1.23 (0.11)
AETD1017	15 ¹⁵ / ₁₆ " (405)	17 ¹³ / ₁₆ " (452)	16 ⁷ / ₁₆ " (418)	18 ⁵ / ₁₆ " (465)	1.33 (0.12)	1.97 (0.18)
AETD2017	25 ¹¹ / ₁₆ " (652)	17 ¹³ / ₁₆ " (452)	26 ³ / ₁₆ " (665)	18 ⁵ / ₁₆ " (465)	2.33 (0.22)	3.18 (0.30)
AETD2617	31 ¹¹ / ₁₆ " (805)	17 ¹³ / ₁₆ " (452)	32 ³ / ₁₆ " (818)	18 ⁵ / ₁₆ " (465)	2.95 (0.27)	3.92 (0.36)
AETD2817	33 ¹¹ / ₁₆ " (856)	17 ¹³ / ₁₆ " (452)	34 ³ / ₁₆ " (868)	18 ⁵ / ₁₆ " (465)	3.16 (0.29)	4.17 (0.39)
AETD3017	37 ¹¹ / ₁₆ " (957)	17 ¹³ / ₁₆ " (452)	38 ³ / ₁₆ " (970)	18 ⁵ / ₁₆ " (465)	3.57 (0.33)	4.66 (0.43)
AETD3617	43 ¹¹ / ₁₆ " (1110)	17 ¹³ / ₁₆ " (452)	44 ³ / ₁₆ " (1122)	18 ⁵ / ₁₆ " (465)	4.19 (0.39)	5.40 (0.50)
AETD4017	50 ³ / ₄ " (1289)	17 ¹³ / ₁₆ " (452)	51 ¹ / ₄ " (1302)	18 ⁵ / ₁₆ " (465)	4.91 (0.46)	6.28 (0.58)
AETD5017	62 ³ / ₄ " (1594)	17 ¹³ / ₁₆ " (452)	63 ¹ / ₄ " (1607)	18 ⁵ / ₁₆ " (465)	6.15 (0.57)	7.76 (0.72)
AETD5417	66 ³ / ₄ " (1695)	17 ¹³ / ₁₆ " (452)	67 ¹ / ₄ " (1708)	18 ⁵ / ₁₆ " (465)	6.56 (0.61)	8.26 (0.77)
AETD6017	74 ³ / ₄ " (1899)	17 ¹³ / ₁₆ " (452)	75 ¹ / ₄ " (1911)	18 ⁵ / ₁₆ " (465)	7.38 (0.69)	9.25 (0.86)
AETD7017	86 ³ / ₄ " (2203)	17 ¹³ / ₁₆ " (452)	87 ¹ / ₄ " (2216)	18 ⁵ / ₁₆ " (465)	8.61 (0.80)	10.73 (1.00)
AETD08111	9 ¹⁵ / ₁₆ " (252)	21 ¹³ / ₁₆ " (554)	10 ⁷ / ₁₆ " (265)	22 ⁵ / ₁₆ " (567)	0.91 (0.08)	1.51 (0.14)
AETD10111	15 ¹⁵ / ₁₆ " (405)	21 ¹³ / ₁₆ " (554)	16 ⁷ / ₁₆ " (418)	22 ⁵ / ₁₆ " (567)	1.69 (0.16)	2.41 (0.22)
AETD20111	25 ¹¹ / ₁₆ " (652)	21 ¹³ / ₁₆ " (554)	26 ³ / ₁₆ " (665)	22 ⁵ / ₁₆ " (567)	2.96 (0.27)	3.89 (0.36)
AETD26111	31 ¹¹ / ₁₆ " (805)	21 ¹³ / ₁₆ " (554)	32 ³ / ₁₆ " (818)	22 ⁵ / ₁₆ " (567)	3.75 (0.35)	4.80 (0.45)
AETD28111	33 ¹¹ / ₁₆ " (856)	21 ¹³ / ₁₆ " (554)	34 ³ / ₁₆ " (868)	22 ⁵ / ₁₆ " (567)	4.01 (0.37)	5.10 (0.47)
AETD30111	37 ¹¹ / ₁₆ " (957)	21 ¹³ / ₁₆ " (554)	38 ³ / ₁₆ " (970)	22 ⁵ / ₁₆ " (567)	4.53 (0.42)	5.71 (0.53)
AETD36111	43 ¹¹ / ₁₆ " (1110)	21 ¹³ / ₁₆ " (554)	44 ³ / ₁₆ " (1122)	22 ⁵ / ₁₆ " (567)	5.32 (0.49)	6.62 (0.61)
AETD40111	50 ³ / ₄ " (1289)	21 ¹³ / ₁₆ " (554)	51 ¹ / ₄ " (1302)	22 ⁵ / ₁₆ " (567)	6.24 (0.58)	7.69 (0.71)

- "Transom Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.

continued on next page




Custom-size windows are available in 1/8" (3) increments.



Direct-Set Rectangular Entry Door Transom

Direct-set transoms (**AETD**) provide maximum unobstructed glass. Direct-set dimensions and specifications shown.



Sash-Set Rectangular Entry Door Transoms

Sash-set single (**AETXXX-1**) and twin (**AETXXX-2**) transoms are also available. Contact your Andersen supplier for dimensions and specifications.

Direct-Set Rectangular Entry Door Transom Dimensions and Specifications (continued)

Transom Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m ²)	Overall Sidelight Area Sq. Ft./ (m ²)
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
AETD50111	62 3/4" (1594)	21 13/16" (554)	63 1/4" (1607)	22 5/16" (567)	7.81 (0.73)	9.51 (0.88)
AETD54111	66 3/4" (1695)	21 13/16" (554)	67 1/4" (1708)	22 5/16" (567)	8.33 (0.77)	10.11 (0.94)
AETD60111	74 3/4" (1899)	21 13/16" (554)	75 1/4" (1911)	22 5/16" (567)	9.37 (0.87)	11.32 (1.05)
AETD70111	86 3/4" (2203)	21 13/16" (554)	87 1/4" (2216)	22 5/16" (567)	10.94 (1.02)	13.14 (1.22)
AETD0827	9 15/16" (252)	30" (762)	10 7/16" (265)	30 1/2" (775)	1.30 (0.12)	2.07 (0.19)
AETD1027	15 15/16" (405)	30" (762)	16 7/16" (418)	30 1/2" (775)	2.43 (0.23)	3.32 (0.31)
AETD2027	25 11/16" (652)	30" (762)	26 3/16" (665)	30 1/2" (775)	4.25 (0.39)	5.35 (0.50)
AETD2627	31 11/16" (805)	30" (762)	32 3/16" (818)	30 1/2" (775)	5.38 (0.50)	6.60 (0.61)
AETD2827	33 11/16" (856)	30" (762)	34 3/16" (868)	30 1/2" (775)	5.75 (0.53)	7.02 (0.65)
AETD3027	37 11/16" (957)	30" (762)	38 3/16" (970)	30 1/2" (775)	6.50 (0.60)	7.85 (0.73)
AETD3627	43 11/16" (1110)	30" (762)	44 3/16" (1122)	30 1/2" (775)	7.63 (0.71)	9.10 (0.85)
AETD4027	50 3/4" (1289)	30" (762)	51 1/4" (1302)	30 1/2" (775)	8.95 (0.83)	10.57 (0.98)
AETD5027	62 3/4" (1594)	30" (762)	63 1/4" (1607)	30 1/2" (775)	11.20 (1.04)	13.07 (1.21)
AETD5427	66 3/4" (1695)	30" (762)	67 1/4" (1708)	30 1/2" (775)	11.95 (1.11)	13.91 (1.29)
AETD6027	74 3/4" (1899)	30" (762)	75 1/4" (1911)	30 1/2" (775)	13.45 (1.25)	15.57 (1.45)
AETD7027	86 3/4" (2203)	30" (762)	87 1/4" (2216)	30 1/2" (775)	15.70 (1.46)	18.07 (1.68)
AETD4029	50 3/4" (1289)	32" (813)	51 1/4" (1302)	32 1/2" (826)	9.62 (0.89)	11.28 (1.05)
AETD5029	62 3/4" (1594)	32" (813)	63 1/4" (1607)	32 1/2" (826)	12.03 (1.12)	13.94 (1.30)
AETD5429	66 3/4" (1695)	32" (813)	67 1/4" (1708)	32 1/2" (826)	12.84 (1.19)	14.83 (1.38)
AETD6029	74 3/4" (1899)	32" (813)	75 1/4" (1911)	32 1/2" (826)	14.45 (1.34)	16.61 (1.54)
AETD7029	86 3/4" (2203)	32" (813)	87 1/4" (2216)	32 1/2" (826)	16.87 (1.57)	19.28 (1.79)
AETD4041	50 3/4" (1289)	48" (1219)	51 1/4" (1302)	48 1/2" (1232)	14.92 (1.39)	16.92 (1.57)
AETD5041	62 3/4" (1594)	48" (1219)	63 1/4" (1607)	48 1/2" (1232)	18.67 (1.73)	20.92 (1.94)
AETD5441	66 3/4" (1695)	48" (1219)	67 1/4" (1708)	48 1/2" (1232)	19.92 (1.85)	22.25 (2.07)
AETD6041	74 3/4" (1899)	48" (1219)	75 1/4" (1911)	48 1/2" (1232)	22.42 (2.08)	24.92 (2.32)
AETD7041	86 3/4" (2203)	48" (1219)	87 1/4" (2216)	48 1/2" (1232)	26.17 (2.43)	28.92 (2.69)
AETD4051	50 3/4" (1289)	60" (1524)	51 1/4" (1302)	60 1/2" (1537)	18.90 (1.76)	21.15 (1.96)
AETD5051	62 3/4" (1594)	60" (1524)	63 1/4" (1607)	60 1/2" (1537)	23.65 (2.20)	26.15 (2.43)
AETD5451	66 3/4" (1695)	60" (1524)	67 1/4" (1708)	60 1/2" (1537)	25.23 (2.34)	27.81 (2.58)
AETD6051	74 3/4" (1899)	60" (1524)	75 1/4" (1911)	60 1/2" (1537)	28.40 (2.64)	31.15 (2.89)
AETD7051	86 3/4" (2203)	60" (1524)	87 1/4" (2216)	60 1/2" (1537)	33.15 (3.08)	36.15 (3.36)

- "Transom Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.



Custom-size windows are available in 1/8" (3) increments.



Direct-Set Rectangular Entry Door Transom

Direct-set transoms (**AETD**) provide maximum unobstructed glass. Direct-set dimensions and specifications shown.



Sash-Set Rectangular Entry Door Transoms

Sash-set single (**AETXXX-1**) and twin (**AETXXX-2**) transoms are also available. Contact your Andersen supplier for dimensions and specifications.

