



MEASURING GUIDE FOR DOUBLE STORM DOORS

CHECK TO ENSURE DOOR OPENING AND TRIM ALLOW ENOUGH SPACE FOR A STORM DOOR

DIMENSION A: Minimum 3/4" width

flat trim surface required

DIMENSION B: Minimum 1" trim

(brickmould) depth required

DIMENSION C: Minimum of 21/2"door

frame (jamb) depth required*

ENTRANCE DOOR (closed position) Door frame (jamb) Exterior door trim (brick mould) Storm Door Opening Width Measure from inside face of brick mould

INTERIOR

EXTERIOR

2

MEASURE DOOR OPENING IN ORDER TO DETERMINE THE SIZE STORM DOOR YOUNEED

Measure the width of the door opening at the inside face of exterior trim on each side at top, center & bottom and record the shortest measurement.


(see measure points W1, W2 & W3 in theillustration)

Measure for the height from the sill to the under-side of the brickmould at the top at the center of the opening and towards each side. (see measure points H1, H2 & H3 in theillustration)

RECORD YOUR SHORTEST
WIDTHMEASUREMENT:
W:

RECORD YOUR SHORTEST
HEIGHTMEASUREMENT:

H:

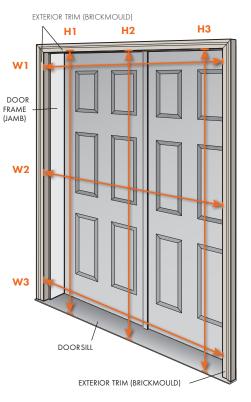

3

DETERMINE THE SIZE YOU NEED BASED ON THE DOOR OPENING MEASUREMENTS AND THE STORM DOOR MODEL THAT IS SELECTED

STANDARD DOOR SIZE WIDTH RANGES:	Two 30"	Two 32"	Two 33" Tv	vo 34" Tw	o 36"
Andersen 4000 & 3000	597/8"	63 7/8"	657/8"	677/8"	71 7/8"
Series Storm Doors with 45	⊺○	TO	TO	TO	TO
Minute Easy Install System	603/8"	64 3/8"	663/8"	683/8"	72 3/8"
Andersen 2500 & 2000 Series and EMCO Storm Doors	593/4"	633/4"	653/4"	673/4"	713/4"
	TO	TO	TO	TO	TO
	603/8"	643/8"	663/8"	683/8"	723/8"

STANDARD DOORSI HEIGHT RANGES		84"†
X	80" ^{TO} 80 7/8" 8	84" TO 847/8"
Х	80" TO 80 7/8"	84" TO 847/8"

† Only available in 32 and 36 inchwidths.

If your measurements are outside the standard width or height ranges shown above, you will require a custom sizedoor."

CUSTOM CUSTOM XL

Andersen Custom Door Opening WIDTHS: 55 7/8" TO 77 3/8" 55 7/8" TO 84 3/8"

EMCO Custom Door Opening WIDTHS: 55 3/4" TO 773/8" 77 7/16" TO 843/8"

Andersen Custom Door Opening HEIGHTS: 72-TO 847/8- 72-TO 96- EMCO Custom Door Opening HEIGHTS: 75-TO 847/8- 79-TO 91-



^{*} Note: Depending on the depth and location of your entry door handle set, additional clearance may beneeded.