



<h2 style="margin: 0;">Polypropylene Homopolymer</h2> <h1 style="margin: 20px 0 0 0; color: white;">HKQ205</h1>	<p><b>Technical support:</b>                  Polymer Technology Services Centre                  22 Pressburg Road,                  Modderfontein, 1609                  South Africa</p> <p>Tel: +27 (0)11 458 0700                  Fax: +27 (0)11 458 0734</p>	<p><b>Sales office:</b>                  Sasol Base Chemicals                  PO Box 5486                  Johannesburg, 2000                  South Africa</p> <p>Tel: +27 (0)10 344 5000                  E-mail: polymers@sasol.com</p>
---	---	---

Date of issue: April 2017

www.sasol.com

**MFR: 3.0 g/10min**

**Density: 0.905 g/cm<sup>3</sup>**

**Features**

- Low flow
- Standard molecular weight distribution
- Medium isotacticity
- Specifically formulated for the production of BOPP film

**Applications**

**Extrusion**

- Co-extrusion application
- Print lamination
- Metallized film
- Coated film
- Pressure sensitive tapes
- Food packaging
- Cigarette & textile packaging

**Additives**


- Antioxidant
- Processing stabiliser
- Acid scavenger (calcium stearate free)

Typical properties (not to be construed as specifications)		Value (SI)	Value (English)	Method
<b>Resin Properties</b>	Melt mass-flow rate – MFR (230/2.16)	3.0 g/10min	3.0 g/10min	ISO 1133
<b>Physical Properties</b>	Flexural modulus	1 350 MPa	195 800 psi	ISO 178
	Tensile modulus of elasticity	1 400 MPa	203 050 psi	ISO 527-2
	Tensile stress at yield	33 MPa	4 786 psi	ISO 527-2
	Tensile strain at yield	10 %	10 %	ISO 527-2
	Tensile strain at break	>50 %	>50 %	ISO 527-2
	Charpy notched impact strength (23°C)	4.5 kJ/m <sup>2</sup>	2.1 ft·lbf/in <sup>2</sup>	ISO 179-1
	Ball indentation hardness – HB	60 N/mm <sup>2</sup>	8 700 psi	ISO 2039-1
<b>Thermal Properties</b>	Melting temperature – DSC	165°C	328°F	ISO 11357-3
	Heat deflection temperature – HDT / A (1.8 MPa)	47°C	117°F	ISO 75-2
	Heat deflection temperature – HDT / B (0.45 MPa)	70°C	158°F	ISO 75-2
	Vicat softening temperature – VST / A120 (10 N)	153°C	307°F	ISO 306



**Typical processing conditions – HKQ205**

**Film extrusion**

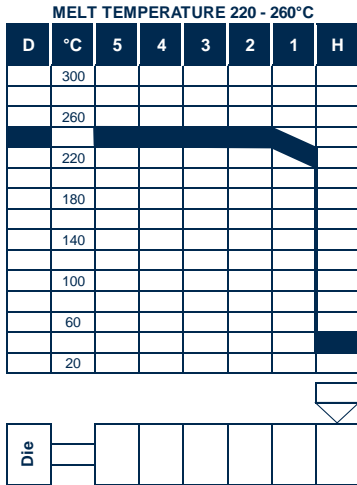

**Handling**

Workers should be protected from the possibility of skin or eye contact with molten polymer. Safety glasses are suggested as a minimal protection to prevent possible mechanical or thermal injury to the eyes. Fabrication areas should be ventilated to carry away fumes or vapours. Please consult the material safety data sheet (SDS) for more detailed information.

**Storage**

As ultraviolet light may cause a change in material properties, all resins should be protected from direct sunlight during storage. If stored in cool (<25°C), dry area with low ambient light levels, polyolefin resins are expected to maintain their original material and processing properties for at least 12 months.

**Combustibility**

Polypropylene resins will burn when supplied adequate heat and oxygen. They should be handled and stored away from contact with direct flames and/or other ignition sources. In burning, polypropylene resins contribute high heat and may generate a dense black smoke. Fires can be extinguished by conventional means with water, water mist being preferred. In enclosed areas, fire fighters should be provided with self contained breathing apparatus.

**Conveying**

Conveying equipment should be designed to prevent accumulation of fines and dust particles that are contained in all polypropylene resins. The fines and dust particles can, under certain conditions, pose an explosion hazard. We recommend that the conveying system used:

- be equipped with adequate filters
- is operated and maintained in such a manner to ensure no leaks develop
- that adequate grounding exists at all times

It is further recommended that good housekeeping is practiced throughout the facility.

**Regulatory & Legal Compliance**

This material complies with FDA regulation 21 CFR 177.1520 when used unmodified and according to good manufacturing practices for food contact applications. Refer to applicable food contact compliance statement which is available on request.

This material is not medically approved and should therefore not be used in any such application.

This publication contains information provided in good faith and is indicative, based on Sasol's current knowledge on the subject. No guarantee or warranty is intended or implied. We reserve the right to make changes as a result of technological progress or development. Any information, including suggestions for use of products, should not preclude experimental testing and verification, to ensure the suitability of a product for each specific application. Users must also abide by local and international laws and obtain all necessary permits when required to do so. Prior to handling a hazardous product, consult its safety data sheet. In case of questions or queries, please contact Sasol through our customer service channels. All products purchased from Sasol Chemicals are subject to the terms and conditions as set out in the contract, order confirmation and/or bill of lading.